

10-10-00

A



PATENT

Docket No. 1731-4108

Express Mail Label No. EJ 606 937 009 US



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

UTILITY APPLICATION AND APPLICATION FEE TRANSMITTAL (1.53(b))

COMMISSIONER FOR PATENTS

Box Patent Application
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of

Named Inventor(s) and
Address(es):

Isaac Cohen, residing at 1171 Carls Straight Path, Dix Hills, New York 11746

For:

DRIVE CIRCUIT FOR SYNCHRONOUS RECTIFIERS

Enclosed are:

[X] 49 pages of specification (excluding claims), 1 page of Abstract, 19 pages of claims

[X] 18 sheets of drawing [] formal [X] informal

[X] 3 pages of Declaration and Power of Attorney

[] Unsigned

[X] Newly Executed

[] Copy from prior application

[] Deletion of inventors including Signed Statement under 37 C.F.R. § 1.63(d)(2)

[] Incorporation by Reference: The entire disclosure of the prior application, from which a copy of the combined declaration and power of attorney is supplied herein, is considered as being part of the disclosure of the accompanying application and is incorporated herein by reference.

[] Microfiche Computer Program (Appendix)

[] _____ page(s) of Sequence Listing

[] computer readable disk containing Sequence Listing

[] Statement under 37 C.F.R. § 1.821(f) that computer and paper copies of the Sequence Listing are the same

- ☐ Claim for Priority
- ☐ Certified copy of Priority Document(s)
- ☐ English translation documents
- ☐ Information Disclosure Statement
- ☐ Copy of ____ cited references
- ☐ Copy of PTO-1449 filed in parent application serial No. _____.
- ☐ Preliminary Amendment
- ☒ Return receipt postcard (MPEP 503)
- ☐ Assignment Papers (assignment cover sheet and assignment documents)
- ☐ A check in the amount of \$40.00 for recording the Assignment.
- ☐ Assignment papers filed in parent application Serial No. _____.
- ☐ Certification of chain of title pursuant to 37 C.F.R. § 3.73(b).
- ☐ This is a ☐ continuation ☐ divisional ☐ continuation-in-part (C-I-P) of prior application serial no. _____.
- ☐ Cancel in this application original claims _____ of the parent application before calculating the filing fee. (At least one original independent claim must be retained for filing purposes.)
- ☐ A preliminary Amendment is enclosed. (Claims added by this Amendment have been properly numbered consecutively beginning with the number following the highest numbered original claim in the prior application.
- ☐ The status of the parent application is as follows:
- ☐ A Petition For Extension of Time and a Fee therefor has been or is being filed in the parent application to extend the term for action in the parent application until _____.
- ☐ A copy of the Petition for Extension of Time in the co-pending parent application is attached.
- ☐ No Petition For Extension of Time and Fee therefor are necessary in the co-pending parent application.
- ☐ Please abandon the parent application at a time while the parent application is pending or at a time when the petition for extension of time in that application is granted and while this application is pending has been granted a filing date, so as to make this application co-pending.
- ☐ Transfer the drawing(s) from the patent application to this application.
- ☐ Amend the specification by inserting before the first line the sentence:
This is a ☐ continuation ☐ divisional ☐ continuation-in-part of co-pending application Serial No. _____
_____ filed _____.

I. CALCULATION OF APPLICATION FEE (For Other Than A Small Entity)

	Number Filed		Number Extra		Rate	Basic Fee
						\$ 710.00
Total Claims	82	-20=	62		x\$18.00	\$1,116.00
Independent Claims	7	- 3=	4		x\$80.00	\$ 320.00
Multiple Dependent Claims	[] yes		Additional Fee =		\$270.00	\$ None
	[X] no		Add'l Fee =		NONE	

Total: \$2,146.00

- [] A statement claiming small entity status is attached or has been filed in the above-identified parent application and its benefit under 37 C.F.R. § 1.28(a) is hereby claimed. Reduced fees under 37 C.F.R. § 1.9(F) (50% of total) paid herewith \$ _____.
- [] A check in the amount of \$ _____ in payment of the application filing fees is attached.
- [X] Charge Fee(s) to Deposit Account No. 13-4500. Order No. 1731-4108. A DUPLICATE COPY OF THIS SHEET IS ATTACHED.
- [X] The Assistant Commissioner is hereby authorized to charge any additional fees which may be required for filing this application, or credit any overpayment to Deposit Account No. 13-4500, Order No. 1731-4108. A DUPLICATE COPY OF THIS SHEET IS ATTACHED.

Respectfully submitted,

MORGAN & FINNEGAN, L.L.P.

Dated: October 6, 2000

By: DAVID V. ROSSI
Registration No. 36,659

CORRESPONDENCE ADDRESS:

MORGAN & FINNEGAN, L.L.P.
345 Park Avenue
New York, New York 10154
(212) 758-4800
(212) 751-6849 FacsimileFORM: UTL-TRAN.NY
Rev. 10/01/00

PATENT

Docket No. 1731-4108

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant(s) : **Isaac Cohen** Group Art Unit: To Be Assigned
Serial No. : To Be Assigned Examiner: To Be Assigned
Filed : October 6, 2000
For : ***DRIVE CIRCUIT FOR SYNCHRONOUS RECTIFIERS***

JC806 U.S. PTO
09/684850
10/06/00

EXPRESS MAIL CERTIFICATE

Express Mail Label No. EJ 606 937 009 US

Date of Deposit October 6, 2000

I hereby certify that the following attached paper(s) and/or fee

Utility Application Cover Sheet (in duplicate); Specification (49 pages, excluding claims); Abstract (1 page); Claims 1-82 (19 pages); Figures 1, 2A, 2B and 3-20 (18 sheets); Title Cover Sheet (1 page); Executed Declaration (3 pages); and Return Receipt Postcard

is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. §1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

ALBERT ISLES

(Typed or printed name of person mailing paper(s) and/or fee)



(Signature of person mailing paper(s) and/or fee)

CORRESPONDENCE ADDRESS:
MORGAN & FINNEGAN, L.L.P.
345 Park Avenue
New York, New York 10154
(212) 758-4800
(212) 751-6849 Facsimile

FORM: EXP-MAIL.NY
Rev. 05/27/98

PATENT

Docket No. 1731-4108

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
APPLICATION FOR LETTERS PATENT

Inventor : Isaac COHEN

Title : *DRIVE CIRCUIT FOR SYNCHRONOUS RECTIFIERS*

DOCKET 1731-4108

Express Mail Label No. EJ606937009US

DRIVE CIRCUITS FOR SYNCHRONOUS RECTIFIERS

This application claims the benefit of U.S. Provisional Application No. 60/158,539, filed October 8, 1999.

FIELD OF THE INVENTION

The present invention relates to synchronous rectification in switchmode converters, and more specifically, to generating drive signals for synchronous rectifiers that may be implemented in various DC-to-DC converter topologies.

BACKGROUND OF THE INVENTION

Conventional switchmode converters typically include passive rectifying devices, such as Schottky diodes, through which output or load current flows during operation. In order to reduce conduction losses and improve efficiency, however, a passive rectifying device may be replaced with an active switching device (e.g., a transistor), referred to as a synchronous rectifier. Such a synchronous rectifier may be periodically driven into conduction and non-conduction modes in synchronism with a periodic waveform.

A problem associated with using transistors as synchronous rectifiers is the requirement for properly timed drive signals to control the switching of the synchronous rectifier transistors. For example, improper timing of synchronous rectifiers in DC to DC converters may result in cross conduction through the rectifier at times other than the commutation interval, and/or in reverse recovery currents caused by the conduction of the body diode of one rectifier at the turn-on instant of the second

rectifier. In the case of a converter providing electrical isolation between its input and output, this problem is more serious because the synchronous rectifier drives are isolated from the drives of the primary side transistors.

U.S. Patent Nos. 5,872,705, 5,528,482, 5,303,138 relate to controlling the timing of the synchronous rectifiers in certain clamped converter topologies. Generally, these patents all describe using the voltage across the transformer secondary winding to directly drive the synchronous rectifier that should conduct while the transformer voltage is clamped. For example, U.S. Patent No. 5,872,705 shows a clamped forward converter in which the flywheel rectifier is driven on in direct response to the secondary voltage being clamped during the reset interval, and is driven off in direct response to the secondary voltage not being clamped and the primary switch that couples the transformer primary winding to a DC power source being on. Such driving and timing control of the synchronous rectifiers is evidently not well suited for topologies that do not have a clamped secondary voltage signal. For example, as may be appreciated, in topologies that do not have such clamping, during the period that a primary switch (i.e., a switch that couples the transformer primary winding to a DC power source) is off (e.g., during the reset interval in a forward converter, or the flyback interval in a flyback converter), the magnitude of the secondary voltage may decrease to a level insufficient to maintain a synchronous rectifier in an on state for the desired time required to provide synchronous rectification and, *a fortiori*, the associated advantages would be lost. For instance, if the rectifier turns off before the current through it becomes negligible, then the current will flow through the rectifier's body diode, resulting in inefficiencies (e.g.,

losses) associated with, for example, reverse recovery currents as well as a larger voltage drop across the rectifier than if the rectifier remained on.

U.S. Patent No. 6,011,703 relates to a self-synchronized gate drive for a synchronous rectifier. The self-synchronized gate drive includes a drive winding associated with the transformer secondary, and the drive winding is coupled to a discharge device and to a drive switch that in turn is connected to the control gate of a second rectifier. The primary winding of the transformer is selectively connected to a DC power source via a primary switch, in a conventional manner. While the primary switch is on, the drive winding voltage drives the drive switch and discharge device such that the discharge device is off and the control terminal of the second rectifier is charged, causing the second rectifier to be on. Alternatively, while the primary switch is off, the drive winding voltage is clamped and drives the drive switch and discharge device such that the discharge device discharges the control terminal of the second rectifier which is thus maintained off synchronously with the voltage on the secondary. It may be understood that if the magnitude of the secondary voltage were not maintained at a sufficient level during the period when the primary switch is off (e.g., the secondary voltage not clamped and the transformer resets before the end of the primary switch off period), synchronous rectification would not occur. Accordingly, as for the aforementioned patents, this patent also discloses using the secondary winding to control rectifier switch timing in a manner that may provide synchronous rectification in a limited range of topologies.

It may be appreciated, therefore, that there remains a need for further improvements and advancements in providing synchronous rectification in switchmode

converters. For example, such improvements and advancements would provide sufficient timing accuracy to avoid the deleterious effects of, for example, cross-conduction and reverse recovery currents, while preferably also being well suited for myriad converter topologies (e.g., not limited to topologies that provide a clamped secondary voltage during the off-period of the primary switch).

In various applications, such as in switchmode power supply control, it is desirable to have a pulse width modulation (PWM) controller that has a maximum duty cycle which is not necessarily approximately 50% and which is preferably relatively temperature insensitive.

SUMMARY OF THE INVENTION

The present invention provides such advancements and overcomes the above mentioned problems and other limitations of the background and prior art, by providing a method and system for providing synchronous rectification in power converters that includes controlling turnoff of a synchronous rectifier according to a timing signal representative of the switching time of a switch that is coupled to an input of the power converter, such as a primary switch that selectively couples the power converter input to an electrical power source. In accordance with an aspect of the present invention, such a timing signal may be obtained directly or indirectly in various ways; for example, by sensing the voltage across the primary switch, or by sensing the drive voltage of the primary switch. Additional illustrative alternative ways for obtaining the timing signal in an isolated converter having a transformer with a primary winding that is selectively coupled to the electrical power source includes sensing the primary winding voltage, for

example, by directly sensing the primary voltage or by sensing the voltage across an auxiliary winding that is closely coupled to the primary winding.

In accordance with an aspect of the present invention, a power converter comprises a rectifier device that includes a conduction control terminal and a bi-directional conduction path selectively enabled by the conduction control terminal, such that when the conduction control terminal is driven ON the bi-directional conduction path is activated to conduct current provided to an output of the power converter, and when the conduction control terminal is driven OFF the bi-directional conduction path is de-activated. The converter also includes a circuit that senses a timing signal representative of the approximate switch timing of the primary switch, and in response to the timing signal drives the conduction control terminal OFF to de-activate the bi-directional conduction path.

In accordance with another aspect of the present invention, the conduction control terminal of the rectifier is driven OFF relative to the timing signal representative of the switching time of the primary switch at a time when the output current conducted by the bi-directional conduction path to the output reduces to a substantially negligible amount. That is, such a timing signal may be used to turnoff a synchronous rectifier near or at the end of its commutation interval, namely, near or at the time that the current in the synchronous rectifier switch drops naturally to a negligible or approximately zero amount, but before any substantial or non-negligible current flows in a body diode associated with the synchronous rectifier. The time delay for driving turn OFF of the rectifier relative to the timing signal may be fixed or variable.

The rectifier may also be driven ON in response to the timing signal.

Alternatively, in accordance with another aspect of the present invention, the rectifier is driven ON in response to a timing signal that is not a timing signal representative of the switch timing of the primary switch, turn ON and turn OFF of the rectifier thereby being driven independently. Turn-on of the rectifier is driven in response to a second timing signal that, at least during times when the timing signal transitions between levels corresponding to the primary switch switching between the conductive state and the substantially non-conductive state, is not substantially in phase with nor substantially a mirror of the approximate switch timing of the primary switch. The second signal is thus independent of a timing signal representative of the switching time of the primary switch.

In accordance with a further aspect of the present invention, synchronous rectifier control may be implemented in myriad topologies including forward, flyback and double-ended topologies, and is applicable to both clamped and unclamped implementations.

In accordance with yet another aspect of the present invention, in a power converter having a synchronous rectifier that includes a conduction control terminal and a bi-directional conduction path selectively enabled by the conduction control terminal, such that when the conduction control terminal is driven ON in response to a timing signal the bi-directional conduction path is activated to conduct output current provided to an output of the power converter, the amplitude of a drive signal applied to the conduction control terminal of the synchronous rectifier to drive the synchronous rectifier ON is modulated as a function of the output current of the power converter, such that when the output current decreases below an approximate threshold the drive signal is

incapable of driving the rectifier ON in response to the second timing signal, the rectifier thereby being maintained OFF while the output current is below the approximate threshold.

According to yet another aspect of the present invention, a bias power supply is provided in a power converter that includes a transformer having a primary winding and a secondary winding, with a freewheeling rectifier and a forward rectifier coupled to the secondary winding, and a primary switch coupled to the primary winding to repetitively couple the winding to an electrical power source. The freewheeling rectifier and the forward rectifier each have respective associated body diodes. The power converter is also provided with a first diode that permits unidirectional current flow from a first end of the secondary winding to a node that provides the bias power supply, and a second diode that permits unidirectional current flow from a second end of the winding of the transformer to the node, wherein the first and second diodes form a bridge with the body diodes of the forward rectifier and the flywheel rectifier for providing the bias power supply in response to the primary switch repetitively coupling the primary winding to the electrical power source.

In accordance with an aspect of the present invention, the charging time of a sawtooth oscillator is alternately modified in successive charging intervals to provide a maximum duty cycle for a PWM that is effectively determined by the ratio of the charging times. In such a PWM, the sawtooth oscillator output signal is compared with another voltage signal (e.g., an error voltage signal) to provide modulation of the PWM output signal. In accordance with another aspect of the present invention, the period of a saw tooth oscillator is modified by modifying the charge time during the time the PWM

output is high (or low) so the duty cycle generated by a flipflop (e.g., toggle type) of the PWM is modified to a fixed maximum value. In accordance with a further aspect of the present invention, the charge time is modified by modifying, during successive and alternating charging time intervals, the resistance that determines the charging current or rate. Such a resistance may, for example, determine the current of a current source, or the RC time constant of an RC type circuit.

BRIEF DESCRIPTION OF THE DRAWINGS

Additional aspects, features, and advantages of the invention will be understood and will become more readily apparent when the invention is considered in the light of the following description made in conjunction with the accompanying drawings, wherein:

FIG. 1 is an illustration of a conventional resonant reset forward converter;

FIG. 2A illustrates the approximate voltage across the primary winding of the transformer of the converter of **FIG. 1**;

FIG. 2B illustrates the approximate voltage across the secondary winding of the transformer of the converter of **FIG. 1**;

FIG. 3 schematically depicts a forward converter with the rectifiers implemented with transistors, and an auxiliary winding closely coupled to the primary winding to provide a timing signal from which appropriately delayed rectifier drive signals are generated, in accordance with an embodiment of the present invention;

FIG. 4 is a schematic illustration of a circuit for generating a forward rectifier control signal, in accordance with an embodiment of the present invention;

FIG. 5 is a schematic illustration of a circuit for generating a freewheel (or flywheel) rectifier control signal, in accordance with an embodiment of the present invention;

FIG. 6 depicts resonant reset forward converter with synchronous rectification control signals generated by observing the drive signal for the primary transistor, in accordance with an embodiment of the present invention;

FIG. 7 depicts an alternative implementation for driving synchronous rectifiers of a resonant reset forward converter, in accordance with an embodiment of the present invention;

FIG. 8 shows a resonant reset forward converter with the forward rectifier implemented as a Schottky rectifier, and the freewheel rectifier implemented as a synchronous rectifier, in accordance with an embodiment of the present invention;

FIG. 9 illustrates a resonant reset forward converter with capacitive coupling of the primary switch gate drive to provide a timing signal for synchronous rectification, in accordance with an embodiment of the present invention;

FIG. 10 illustrates a resonant reset forward converter with capacitive coupling of the primary switch drain voltage to provide a timing signal for synchronous rectification, in accordance with an embodiment of the present invention;

FIG. 11 depicts a resonant reset forward converter with capacitive coupling of the voltage across an auxiliary winding closely coupled to the primary winding to provide a timing signal for synchronous rectification, in accordance with an embodiment of the present invention;

Fig. 16 is an illustration of another embodiment of a resonant reset forward converter with capacitive coupling.

FIG. 12 schematically depicts a resonant reset forward converter that provides a bias power supply by using the synchronous rectifiers and additional diodes to provide a bridge, in accordance with an embodiment of the present invention;

FIG. 13 shows a flyback converter with synchronous rectification, in accordance with an embodiment of the present invention;

FIG. 14 shows a resonant reset forward converter implementing amplitude modulation of the synchronous rectifier drive signals as a function of the load current, in accordance with an embodiment of the present invention;

FIG. 15 is a schematic double-ended converter having synchronous rectification implemented in accordance with an embodiment of the present invention;

FIG. 16 schematically depicts a Polikarpov-type converter, implemented with synchronous rectification in accordance with an embodiment of the present invention;

FIG. 17 shows an illustrative timing circuit for controlling synchronous rectification in a Polikarpov-type converter, in accordance with an embodiment of the present invention;

FIG. 18 illustrates a converter in which the turn-off of a synchronous rectifier is driven in response to a timing signal representative of the primary winding voltage, and the turn-on of the synchronous rectifier is driven in response to a signal derived from the secondary winding, which as used herein, is not a signal

representative of the primary winding voltage, in accordance with an embodiment of the present invention;

FIG. 19 shows an illustrative embodiment of the present invention implemented with a Unitrode UC3825 High Speed PWM controller IC (integrated circuit) 50; and

FIG. 20 shows waveforms measured for an experiment conducted in accordance with the embodiment of **FIG. 19**.

DETAILED DESCRIPTION OF EMBODIMENTS OF THE INVENTION

Prior to describing various illustrative embodiments of the invention, the present invention may be better appreciated with reference to **FIG. 1**, which schematically depicts a conventional resonant reset forward converter, which includes a transformer **102** having a primary winding **104** connected in series with a DC power source **100** (of voltage V_{in}) and a primary transistor **106**, which has an associated parallel capacitance **118**. Secondary winding **108** of transformer **102** is connected in series with a forward rectifier **110**, and this series connection is connected in parallel with a freewheel rectifier **112**. Forward rectifier **110** and freewheel rectifier **112** are situated to permit current flow to the converter output through filter inductor **114** at one end of filter capacitor **116**. It may be appreciated that capacitance **118**, sometimes referred to as a snubbing capacitance, schematically represents intrinsic capacitances (e.g., parasitic capacitances) as well as any extrinsic capacitances (i.e., additionally added capacitor components). For example, a design may not employ an additional

external capacitor, but rely solely on intrinsic capacitances (e.g., the output capacitance of primary transistor **106**, as well as the reflected junction capacitance of forward rectifier **110**).

For clarity of exposition, detailed design (e.g., selecting magnetizing inductance and snubbing capacitance values to ensure core reset, selecting output inductor value, etc.) and operation of such a circuit are not described herein, as such design and operation are well known to ordinarily skilled artisans and not essential to understanding the present invention. Yet the present invention may be better appreciated based on the following general operational description of the conventional resonant reset converter of **FIG. 1**, with reference to **FIG. 2A** and **FIG. 2B**, which illustrate approximate voltage waveforms across primary winding **104** and secondary winding **108**, respectively.

Primary transistor **106**, shown as a metal oxide semiconductor field-effect transistor (MOSFET), is repetitively switched between an on state and an off state at a given switching frequency, and at a duty cycle, D , that is controlled by pulse-width modulation (PWM) to provide a regulated output voltage. As used herein, a MOSFET is “on” when its channel region is in a substantially low impedance state such that any current flow through the transistor is predominantly through the channel. In such a state, the transistor may conduct current bidirectionally (i.e., in either direction). In contrast, as used herein, a MOSFET is “off” when its channel is in a high impedance state such that there is essentially no current conduction through the channel (e.g., the current through the channel is insignificant relative to the currents designed to flow through the circuit, or relative to currents that may flow through the channel when the

transistor is on). In this “off” state, however, a MOSFET can conduct current unidirectionally through its intrinsic body diode.

While primary transistor **106** is on, the full input voltage V_{in} is applied across primary winding **104**, inducing a corresponding voltage across secondary winding **108**, which causes current to flow through secondary winding **108** and filter inductor **114** via rectifier **110**, thereby storing energy in filter inductor **114**. No current flows through freewheel rectifier **112**, as it is reverse biased.

Upon turn off (i.e., opening) of primary transistor **106**, the voltage across primary transistor **106** increases and the corresponding voltage across primary winding **104** reverses to a negative value as capacitance **118** is initially charged. As this reset period (i.e., primary transistor **106** off) continues, consonant with the operation of the resonant circuit formed between the capacitance **118** and the transformer’s magnetizing inductance, the magnetizing energy is reset and the voltage across primary transistor **106** settles back to about V_{in} (i.e., corresponding to an approximately zero voltage across primary winding **104**).

During this reset interval, the voltage across secondary winding **108** attempts to follow the voltage across primary winding **104**. When primary transistor **106** opens and the primary voltage decreases and swings negative, however, the voltage across secondary winding **108** cannot become negative, but remains at approximately zero volts, until current flowing through forward rectifier **110** decreases to about zero. More specifically, upon turning off primary transistor **106**, a period of time (referred to herein as first commutation interval, **T1**) elapses before substantially all the output current transfers from forward rectifier **110** to freewheel rectifier **112**. Within this first

commutation interval, as current decreases through forward rectifier **110**, the diminished current is compensated for by an increasing current through freewheel rectifier **112**.

The current flow through forward rectifier **110** during the first commutation interval effectively shorts secondary winding **108**, preventing its voltage from decreasing below about zero. Once current flowing through forward rectifier **110** and secondary winding **108** reduces to about zero, however, the voltage across secondary winding **108** may fall below zero. Yet it is also noted that because of reverse recovery effects (i.e., associated with charge storage in the rectifier), once current in forward rectifier **110** falls to about zero at the end of the first commutation interval, it will continue to decrease to a non-negligible current below zero, then increase back to about zero, and freewheel rectifier **112** will therefore conduct this reverse recovery current in addition to the load current. This transient reverse recovery current further prevents the secondary voltage from becoming negative, thus extending the time that the secondary winding is effectively shorted, and also represents energy loss and noise (e.g., electromagnetic interference (EMI)).

Upon turning on primary transistor **106**, the voltage across primary winding **104** increases to the full input voltage V_{in} as capacitance **118** discharges. The voltage across secondary winding **108** attempts to follow the voltage across primary winding **104**; however, the voltage across secondary winding **108** cannot become positive, but remains at approximately zero volts, until current flowing through freewheel rectifier **112** decreases to about zero. More specifically, upon turning on primary transistor **106**, a period of time (referred to herein as second commutation interval, **T2**) elapses before substantially all the output current transfers from freewheel rectifier **112**

to forward rectifier **110**. Within this second commutation interval, as current decreases through freewheel rectifier **112**, the diminished current is compensated for by an increasing current through forward rectifier **112**. The current flow through freewheel rectifier **112** during this second commutation interval (i.e., while forward rectifier **110** also conducts) effectively shorts secondary winding **108**, preventing its voltage from increasing above about zero. Once current flowing through freewheel rectifier **112** reduces to about zero, however, the voltage across secondary winding **108** may increase above the nominal zero level. It is also noted that because of reverse recovery effects (i.e., associated with charge storage in the rectifier), once current in freewheel rectifier **112** falls to about zero at the end of the second commutation interval, it will continue to decrease to a non-negligible value below zero, then increase back to about zero, and forward rectifier **110** will therefore conduct this reverse recovery current in addition to the load current. Analogous to the reverse recovery current associated with the first commutation interval, this transient reverse recovery current further prevents the secondary voltage from becoming positive, and also represents energy loss and noise (e.g., EMI).

Accordingly, from the foregoing general operational description of a conventional forward resonant converter, it may be appreciated that, as shown in **FIGS. 2A** and **2B**, the voltage across secondary winding **108** substantially follows the voltage across primary winding **104**, except that it is shorted to about zero volts during the commutation intervals **T1** and **T2** (i.e., the intervals when the forward output current of one rectifier commutates to the other rectifier), and during reverse recovery current intervals. It is also understood that the voltage waveforms shown in **FIGS. 2A** and **2B**

are merely schematic; for example, as understood from the foregoing operational description, actual waveforms have finite slopes at switching transitions and their profiles during resetting depend on not only the primary magnetizing inductance and snubbing capacitance **118** but also, the operating conditions, such as the input voltage (i.e., the line) and the load (e.g., the output current).

As described, rectifiers **110** and **112** are typically and preferably implemented as synchronous rectifiers by using, for example, MOSFET switches that are controllably switched between their on and off states. In view of the foregoing, it is further understood that during the commutation intervals if either of these switches were turned off too soon, current through the switch would be diverted to its intrinsic body diode (and also to any parallel, externally connected diode), thus resulting in reverse recovery transients. Alternatively, if either one of these switches were turned off too late after the commutation interval, significant cross conduction and shorting of the output may result. From the foregoing, it may also be further appreciated how using the secondary voltage to control synchronous rectification as described, for example, in the patents referred to in the background section, *supra*, is limited to certain topologies (e.g., clamped) and not well suited for mitigating reverse recovery transients.

In accordance with the present invention, synchronous rectification in a power converter is controlled by using a timing signal representative of the primary switching time (i.e., the switching time of the primary switch) to trigger at least turnoff, and also preferably turn-on, of one or more synchronous rectifiers that selectively conduct(s) output current of the power converter. In converters employing galvanic isolation, such a timing signal may be provided by a timing signal representative of the

voltage across the primary winding of the transformer, and such one or more synchronous rectifiers (e.g., implemented as MOSFET switches) are on the secondary side of the transformer. As used herein, and as will be appreciated from the ensuing illustrative embodiments, a timing signal representative of the primary winding voltage refers to a signal that is substantially in phase with or substantially mirrors (disregarding polarity) the primary winding voltage at least during the time that the primary winding voltage transitions between positive and negative voltages. For example, in a resonant reset forward converter topology, a timing signal representative of the primary winding voltage includes, for example, a voltage sensed directly across the winding, a voltage across an additional transformer winding closely coupled to the primary winding, the drain voltage of the primary transistor (e.g., referenced to its grounded source), or the gate voltage of the primary transistor. Stated differently, for isolated converters having a primary switch that selectively couples a primary winding of the transformer to a power source, a primary switch voltage (e.g., drain voltage, or gate voltage) corresponds to the primary winding voltage, and thus, as used herein, a timing signal representative of the primary switch voltage corresponds to a timing signal representative of the primary winding voltage.

More generally, each of these timing signals may be referred to as a timing signal representative of the primary switching time, or as a timing signal representative of the primary switch state. As may also be understood, for a resonant reset forward converter, or in essentially any other converter topology that on the secondary winding(s) side (i.e., the winding(s) conductively coupled to the load) includes, for example, a freewheeling rectifier, a flywheel rectifier, or two rectifiers that

commutate the load current between them, the secondary voltage will not provide such a timing signal because (e.g., due to current commutation) the secondary voltage is neither substantially in phase with nor substantially a mirror image of the primary winding voltage (and thus, nor of the primary switch voltage, nor of the primary switching time) during the time that the primary winding voltage transitions between positive and negative voltages. Simply, as used herein, a signal that cannot transition until the current commutation that is caused by the switching of a primary switch is essentially complete cannot be said to be a signal representative of the primary switching time (also referred to herein as the primary switch timing).

Those skilled in the art will also understand in view of the herein description, that the present invention is also applicable to non-isolated converters; in such applications, a timing signal representative of the primary switch timing, consonant with the above description for isolated converters, is a signal that is substantially in phase with or substantially mirrors (disregarding polarity) a primary switch voltage (e.g., for a MOSFET, its gate drive voltage or its drain voltage) at least during the time that the primary switch voltage transitions between its "high" and "low" voltages as the primary transistor transitions between its two states.

In accordance with an embodiment of the present invention, such a timing signal may be used to turnoff one or more synchronous rectifiers near or at the end of their respective commutation intervals, namely, near or at the time that the current in the synchronous rectifier channel drops naturally to approximately zero, after the time that any substantial or non-negligible current would be diverted from the channel to the body diode associated with the synchronous rectifier, and before any substantial or

non-negligible cross-conduction would occur. As may be appreciated from the foregoing, the turn on timing of the synchronous rectifiers typically is not as critical as turnoff timing, as the body diode can carry the current until the channel is on. Thus, although the timing signal may be advantageously used as a stable triggering time reference for turn-on, other signals may be used to control or trigger turn-on (e.g., the voltage across the secondary).

Referring now to **FIG. 3**, there is shown a schematic representation of a system **99** that includes a resonant reset forward converter **97** with the rectifiers implemented as synchronous rectifiers that are controllably switched according to a timing signal indicative of the voltage across the primary winding, in accordance with an embodiment of the present invention. As appreciated by those skilled in the art, system **99** may be any of myriad systems that incorporates a power converter, such as a power supply, a computer, a repeater or router used in communications systems, or virtually any other electronic or optoelectronic system that incorporates a power converter. More specifically, transformer **102** includes a sense winding **124** that is closely coupled to primary winding **104** such that the voltage generated by sense winding **124** is substantially an exact replica of the voltage across primary winding **104**, including during rectifier commutation intervals when the voltage across secondary winding **108** is shorted to about zero volts and thus does not substantially represent the voltage across primary winding **104**. Forward rectifier **110** and freewheel rectifier **112** are shown as being implemented as transistors (shown as MOSFETs) that are respectively driven with forward rectifier drive signal **120** and freewheel drive signal **122**,

respectively, which drive signals are generated according to the voltage across primary winding **104** as sensed with sense winding **124**.

As implemented in the embodiment of **FIG. 3**, the voltage observed by sense winding **124** is applied via diode **126** to a forward rectifier delay block **128** and to a freewheel rectifier delay block **132**, which have respective outputs applied to a forward rectifier driver **130** and a freewheel rectifier driver **134**, which in turn generate respective drive signals **120** and **122**. In operation, during the on-time of primary transistor **106** (excluding the commutation interval during which output current commutates from freewheel rectifier **112** to forward rectifier **110**), forward rectifier **110** is on to provide a low impedance path for current flow through secondary winding **108**, and freewheel rectifier **112** is off to avoid shorting secondary winding **108**. Upon primary transistor **106** turning off, starting the commutation interval during which output current commutates from forward rectifier **110** to rectifier **112**, the input voltage to forward rectifier delay block **128** and freewheel rectifier delay block **132** goes low. Thereafter, the respective outputs of forward rectifier delay block **128** and freewheel rectifier delay block **132** go low after respective first and second delays, causing forward rectifier driver **130** to drive forward rectifier control signal **120** low, turning off forward rectifier **110**, and causing freewheel rectifier driver **134** to drive freewheel rectifier control signal **122** high, turning on freewheel rectifier **112**.

During the remaining off-time of primary transistor **106** (i.e., excluding the commutation interval during which output current commutates from forward rectifier **110** to freewheel rectifier **112**), forward rectifier **110** is off to prevent reverse current flow through secondary winding **108**, and freewheel rectifier **112** is on to provide a low

impedance, low voltage drop path for conducting the output current that flows through filter inductor **114**. Upon primary transistor **106** turning on, commencing the commutation interval during which output current commutates from freewheel rectifier **112** to rectifier **110**, the input voltage to forward rectifier delay block **128** and freewheel rectifier delay block **132** goes high. Thereafter, the respective outputs of forward rectifier delay block **128** and freewheel rectifier delay block **132** go low after respective third and fourth delays, causing forward rectifier driver **130** to drive forward rectifier control signal **120** high, turning on forward rectifier **110**, and causing freewheel rectifier driver **134** to drive freewheel rectifier control signal **122** low, turning off freewheel rectifier **112**.

Depending on the implementation, the delays provided by delay blocks **128** and **132** at turn-on and turn-off of primary transistor **106** may be fixed (i.e., constant) or variable (e.g., dependent upon one or more circuit parameters, such as output current, output voltage, input voltage, duty cycle, etc.), and may be negligible (e.g., no added delay) or non-negligible (e.g., comparable to) relative to the commutation intervals. For example, as described more fully below, in accordance with an embodiment of the present invention, at turn-off of primary transistor **106**, (i) the output of freewheel rectifier delay block **132** becomes low with essentially no delay from its input going low such that freewheel rectifier driver **134** drives freewheel rectifier control signal **122** high to turn on freewheel rectifier **112** at essentially (e.g., at or near) the beginning of the first commutation interval (i.e., no intentionally added delay), and (ii) the output of delay block **128** becomes low a fixed delay time approximately equal to the first commutation interval, T1, after its input goes low such that forward rectifier

driver **130** drives forward rectifier control signal **120** low to turn off forward rectifier **110** at approximately the end of the first commutation interval. Additionally, in this embodiment, at turn-on of primary transistor **106**, (i) the output of forward rectifier delay block **128** goes high with essentially no delay after its input goes high such that forward rectifier driver **130** drives forward rectifier control signal **120** high to turn on forward rectifier **110** at essentially the beginning of the second commutation interval, and (ii) the output of freewheel rectifier delay block **132** goes high a variable delay approximately equal to the second commutation interval, T_2 , after its input goes high such that freewheel rectifier driver **134** drives freewheel rectifier control signal **122** low to turn off freewheel rectifier **112** at essentially the end of the second commutation interval. As described further below, this variable delay is directly proportional to the output current of the converter, and inversely proportional to the converter input voltage, V_{in} . It may be appreciated that implementing the switch timing in the described manner advantageously minimizes or eliminates deleterious effects (e.g., inefficiency, losses, overvoltages, EMI, etc.) associated with body diode conduction of the output current.

Implementing such synchronous rectifier switch timing relative to the primary switching events (i.e., relative to a signal representative of the voltage across the primary winding) in this embodiment may be further understood as follows. As may be appreciated in view of the foregoing description of **FIGS. 1, 2A and 2B**, during the first commutation interval, **T1**, turning off forward rectifier **110** too soon before the current flowing through it reaches approximately zero causes conduction of the body diode and reverse recovery currents, whereas turning off forward rectifier **110** too late after the current through it decreases to approximately zero can result in

cross-conduction of the synchronous rectifiers with non-negligible current flowing through secondary winding **108** in the opposite direction. Accordingly, forward rectifier **110** may be advantageously turned off after a delay of about **T1** from when primary transistor **106** is turned off. The time between the negative going zero crossing of the voltage across primary winding **104** to the end of the commutation of current from forward rectifier **110** to freewheel rectifier **112** (**T1**) is virtually independent of the input voltage (V_{in}) and the output current (I_{out}), and is approximately equal to one-fourth the resonant period of the circuit formed by the leakage inductance of transformer **102**, L_e , and the effective snubber capacitance **118**, C_{SNB} , which represents the effective total capacitance coupled across the transformer series inductance when primary transistor **106** is turned off. Specifically,

$$T1 \cong \frac{1}{4} \times 2\pi \sqrt{L_e C_{SNB}}$$

Therefore, the timing for switching forward rectifier **110** can be generated by detecting the negative going zero crossing instant of the flyback voltage across transformer **102**, and turning forward rectifier **110** off after a fixed delay, approximately equal to **T1**, from this instant.

Freewheel rectifier **112** is advantageously turned on at the beginning of the first commutation interval to permit low voltage drop current flow. This turn-on time is not critical, however, because the body diode of freewheel rectifier **112** will conduct current until it is turned on, at which point the current will transferring to the channel of freewheel rectifier **112**. Therefore, freewheel rectifier **112** may be turned on after a short (minimum = 0) and non-critical delay, measured after the negative going zero crossing of the voltage across primary winding **104**.

During the second commutation interval, wherein current shifts from freewheel rectifier **112** to forward rectifier **110**, the turn-on timing of forward rectifier **110** is analogous to the described turn-on of freewheel rectifier **112** during the first commutation interval. That is, forward rectifier **110** may be advantageously turned on at the beginning of the second commutation interval to permit low voltage drop current flow; however, turning it on later than this time is not critical because the body diode of forward rectifier **110** will nevertheless conduct commutating current, which will gradually transfer to the channel of forward rectifier **110** once it is turned on. Therefore, forward rectifier **110** can be turned on after a short (minimum = 0) and non-critical delay, measured after the positive going zero crossing of the voltage across primary winding **104**.

During the second commutation interval, as described, freewheel rectifier **112** is advantageously turned off when the current flowing through it reaches approximately zero. Turning off freewheel rectifier **112** too soon before this event results in conduction of the body diode and thus reverse recovery currents; however, turning off freewheel rectifier **112** too late after this event can result in significant cross-conduction and converter output shorting. Therefore, freewheel rectifier **112** is advantageously turned off after a delay of about T_2 from when primary transistor **106** is turned on. In particular, it can be shown that after primary transistor **106** is turned on, the time interval from the positive zero crossing of the voltage across primary winding **104** (V_{pri}) to the moment the current in freewheel rectifier **112** drops to zero may be approximately represented by the following expression:

:

$$T2 = k \times \frac{I_{out}(t_2)}{V_{in}}$$

where $I_{out}(t_2)$ is the value of the output current prior to turning on primary transistor **106**, V_{in} is the input voltage, and k is an appropriate proportionality constant. Accordingly, as schematically depicted in **FIG. 3**, delay block **134** may control the turn-off timing of freewheel rectifier **112** by detecting the positive going zero crossing of the voltage across primary winding **104** and generating a variable delay based on the above expression for $T2$ in response to (i) a signal indicative of $I_{out}(t_2)$ generated by an output current sensing circuit **133** and (ii) a signal indicative of input voltage V_{in} generated by an input voltage sensing circuit **135**. Those skilled in the art understand that there are many ways of implementing output current sensing circuit **133** and input voltage sensing circuit **135**. For example, the information on the value of the output current can be derived from the negative slope of the primary voltage, which is inversely proportional to the value of the output current. Thus, by differentiating this slope and saving (e.g., sample-and- hold or slow discharge peak detection), the resulting voltage will be proportional to the output current.

It is noted that the above estimated expressions for $T1$ and $T2$ are useful in designing appropriate delay circuits; however, in order to minimize errors, the parasitic delay of the circuits should be minimized and the residual delays should be subtracted from the ideal delay values described above. Further, practical designs of such delay circuits may include calibration mechanisms (e.g., using trim potentiometers) for adjusting (e.g., optimizing) the respective fixed and variable delays for turning off the synchronous rectifiers. Additionally, those skilled in the art understand that, in practice, the allowable tolerance in controlling the timing of these switching events depends on

the relative amount of body diode conduction current and/or reverse current that occurs and can be tolerated in a particular design.

FIG. 4 depicts an illustrative embodiment of a circuit for generating forward rectifier control signal **120** for controlling triggering of forward rectifier **110**. A reference voltage V_{ref1} is input to the inverting terminal of comparator **136**. When primary transistor **106** turns on, the voltage sensed by sense winding **124** increases and becomes positive, causing capacitor **138** to rapidly charge via diode **D1**, and thus applying an increasing voltage to the non-inverting terminal of comparator **136**. When the voltage at the positive terminal of comparator **136** rises above the reference voltage V_{ref1} , forward rectifier control signal **120** turns on, which turns on forward rectifier **110**. When primary transistor **106** turns off, the voltage across sense winding **124** decreases and becomes negative, causing transistor **140** (the base of which is coupled to winding **124** via base resistor **Rb**) to turn on. Transistor **140** drains charge off of capacitor **138** via discharge resistor **Rd** at a rate controlled by the RC time constant of the circuit (i.e., about the product of **Rd** and capacitance **138**) . When the voltage at the positive terminal of comparator **136** falls below the reference voltage V_{ref1} , forward rectifier control signal **120** turns off, turning off forward rectifier **110**. Consequently, the time delay can be accurately controlled with the RC time constant and V_{ref1} to approximately equal **T1**.

FIG. 5 illustrates an embodiment of a circuit for generating freewheel rectifier control signal **122** for triggering freewheel rectifier **112**. A reference voltage V_{ref2} is input to the positive terminal of comparator **142**. Particularly, V_{ref2} may be generated by various well known techniques to be proportional to the output current

prior to turning on primary transistor **106**, and inversely proportional to the input voltage. For example, as noted above, a signal proportional to this output current value may be derived from the negative slope of the primary voltage (e.g., sensed with winding **124**). When primary transistor **106** turns on, the voltage across sense winding **124** increases and becomes positive, causing capacitor **144** to begin charging via diode **D2** through resistor **146**, thus applying an increasing positive voltage to the inverting terminal of comparator **142**. When the voltage at the inverting terminal of comparator **142** rises above the reference voltage V_{ref2} , freewheel rectifier control signal **122** turns off, turning off freewheel rectifier **112**. Consequently, a time delay of **T2** can be accurately controlled with the RC time constant and V_{ref2} ; or When primary transistor **106** turns off, the voltage across sense winding **124** decreases and becomes negative, causing transistor **148** (the base of which is coupled to winding **124** via base resistor **147**) to turn on. Transistor **148** thus rapidly discharges capacitor **144** so that the voltage at the negative terminal of comparator **142** falls below the reference voltage of the positive terminal, causing freewheel rectifier control signal **122** to turn on, and turning on freewheel rectifier **112**.

Prior to describing some illustrative alternative embodiments of the present invention, it is noted that in the case of actively clamped converters, the conduction intervals of the synchronous rectifiers and the drive timing requirements are essentially identical to those existing in the forward converter circuit discussed above. As a result, the circuit of the embodiment described above will operate equally well in actively clamped converters. It is also noted that those skilled in the art understand that for clarity of exposition the implementation shown in **FIG. 3** is merely schematic, and

that there are myriad ways of implementing circuitry that couples the voltage observed by sense winding **124** to drive freewheel rectifier **112** and/or forward rectifier **110**. For example, it may be appreciated that although the operational blocks (e.g., delay blocks **132** and **128**, drivers **130** and **134**, etc.) are shown to functionally indicate that the voltage sensed across primary winding **104** may be appropriately delayed and buffered to drive synchronous rectifiers **112** and **110**, actual circuitry need not implement the delay and buffering functions in a serial fashion (e.g., both the delay and buffering may be provided by a common circuit). Similarly, while delay block **132** (**128**) may represent an additional delay intentionally introduced along the signal path between the voltage across sense winding **124** and drive signal **122** (**120**), in various embodiments such an additional intentional delay may not be implemented and thus, for example, delay block **132** (**128**) may only represent the intrinsic delay (e.g., gate delay) of driver **134** (**130**). That is, depending on the implementation, intentional delays may or may not be necessary for turn-on and/or turn-off of at least one synchronous rectifier. Intentional delays may be fixed (i.e., constant) or variable (e.g., dependent upon one or more circuit parameters, such as output current, output voltage, input voltage, duty cycle, etc.). As yet a further illustrative example of alternative embodiments within the purview of the present invention, both turn-on and turn-off of both synchronous rectifiers need not be driven in response to the voltage observed by sense winding **124**. Stated alternatively, the voltage observed by sense winding **124** may be coupled to drive turn-on and/or turn-off for at least one synchronous rectifier, with any turn-on and/or turn-off not so controlled being driven in response to other triggering signal(s) (e.g., the

secondary winding voltage). For clarity of exposition, some illustrative alternative embodiments of the present invention are further described below.

In one alternative embodiment of the present invention, the circuit shown in **FIG. 3** may be modified such that the voltage across secondary winding **108** is used for driving forward rectifier **110**, with freewheel rectifier **112** being driven in response to the primary winding voltage as described and shown above. Although driving forward rectifier **110** in this manner is not necessarily optimal, it may be adequate in certain applications. In such an implementation, the drive voltage for forward rectifier **110** is zero during the commutation intervals. The absence of drive voltage for forward rectifier **110** during the second commutation interval **T2** is not a problem, since the current can flow through the body diode until the drive voltage is applied. However, at the termination of the drive, at the beginning of the first commutation interval **T1**, the absence of drive voltage may cause a problem. Forward rectifier **110** is turned off and the full inductor current will be transferred from its channel to the body diode at the beginning of the commutation interval **T1**. As a result, the body diode will have to recover at the end of the commutation interval, causing a number of potentially serious problems, such as increased losses and electromagnetic interference (EMI). Thus, the voltage across secondary winding **108** is not generally adequate for driving freewheel rectifier **112** but, as noted, may be adequate in some specific applications.

Another embodiment is shown in **FIG. 6**, in which forward rectifier control signal **120** and freewheel rectifier control signal **122** are generated in response to sensing the drive signal for primary transistor **106** (which is representative of the voltage across primary winding **104**) with transformer **150**. When primary transistor **106** turns

off, transformer **150** senses the low drive signal with its primary winding, and applies a low signal to the inputs of forward rectifier delay block **128** and freewheel rectifier delay block **132** with its secondary winding. When primary transistor **106** turns on, transformer **150** senses the high drive signal with its primary winding, and applies a high signal to the inputs of forward rectifier delay block **128** and freewheel rectifier delay block **132** with its secondary winding. In all other respects, the operation of the circuit is essentially the same as the embodiment described above.

Referring to **FIG. 7**, depicted is an illustrative embodiment which may be implemented, for example, in cases where a certain degree of cross conduction and/or reverse recovery current can be tolerated. In these cases, the variable delay generating circuit can be eliminated and the synchronous rectifiers may be driven simply by complementary signals (direct and inverted) generated (without any intentionally added delay; e.g. only with intrinsic delay) by forward rectifier driver **130** and freewheel rectifier driver **134** in response to a signal representative of the primary winding voltage. Although the signals in this case may not be optimal, the inherent delay associated with the drivers may actually improve the operation instead of being detrimental. If delays longer than the natural delay of the drivers yield better performance, the delays can be artificially increased to the optimal value.

Referring to **FIG. 8**, shown is an embodiment which may be applicable, for example, in applications where the operating duty cycle of forward rectifier **110** may be considerably lower than the duty cycle of freewheel rectifier **112**. In such applications, the cost of replacing a diode (e.g., Schottky) rectifier with a MOSFET may not be justified by the relatively small improvement in efficiency. Therefore, as shown, forward

rectifier **110** may be implemented as a Schottky rectifier, and synchronous rectification may be employed only for freewheel rectifier **112**, with the drive signal therefor being provided in accordance with the present invention.

FIG. 9 shows an embodiment of the present invention in which the timing signal for driving the synchronous rectifier(s) is derived by capacitive coupling to a voltage representative of the primary winding voltage. More specifically, in this embodiment, the primary transistor gate drive signal is used as the timing signal. As shown, primary transistor driver **190** generates primary transistor control signal **192** for controlling switching of primary transistor **106**. Driving primary transistor control signal **192** high to turn on primary transistor **106** causes signal **194** to go high through coupling capacitor **196**, and thus causes freewheel rectifier driver **200** to turn off freewheel rectifier **112** after a delay introduced by delay block **200**. Depending on the application, the delay may be, for example, either proportional to the current in filter inductor **114** and inversely proportional to the value of the input voltage **100** (e.g., optimized to turn-off when the current through rectifier **112** decrease to about zero), or fixed at a compromised value. Likewise, the increasing secondary voltage at the input of forward rectifier driver **202** causes forward rectifier **110** to turn on without delay.

Driving primary transistor control signal **192** low to turn off primary transistor **106** causes signal **194** to go low through coupling capacitor **196**. Clamping diode **198** maintains signal **194** above a minimum threshold. The output of delay block **200** becomes low with essentially no intentional delay after signal **194** goes low, and thus freewheel rectifier driver **200** turns on freewheel rectifier **112** at about the time that control signal **192** is driven low. As the current decreases through secondary

winding **108** of transformer **102**, the voltage input to forward rectifier driver **202** decreases. Forward rectifier driver **202** has a fixed delay approximately equal to 1/4 of the natural period of the snubbing capacitance and the effective series inductance of transformer **102**. After the fixed delay, forward rectifier driver **202** turns off forward rectifier **110**.

FIG. 10 shows another embodiment for capacitively coupling the primary to the secondary to provide a timing reference for the synchronous rectifier(s). In this embodiment, the drain voltage of primary switch **106** is capacitively coupled, instead of its gate drive signal as in the embodiment of **FIG. 10**. Turning primary transistor **106** off causes signal **204** to go high through coupling capacitor **206**. Signal **204** is input to delay block **208** which in response provides an output without delay to freewheel rectifier driver **200** which turns on freewheel rectifier **112**. Turning primary transistor **106** on causes signal **204** to go low through coupling capacitor **206**. Clamping diode **208** maintains signal **204** above a minimum threshold. Signal **204** is input to freewheel rectifier driver **200**, which turns off freewheel rectifier **112** after a delay, as described above. The timing for forward rectifier **110** is essentially the same as described for **FIG. 9**.

Referring now to **FIG. 11**, in accordance with yet a further illustrative embodiment of the present invention, there shown a power converter implementing a synchronous drive by capacitively coupling the signal of an auxiliary winding that is closely coupled to the primary winding. The voltage on winding **Wx** is clamped to ground by capacitor **C** and diode **CR**. As a result, the voltage at the input of buffer/driver **Dr** is logically "high" whenever the primary switch **106** is off, and thus

appropriately controls the switching of synchronous freewheel rectifier **112** via buffer/driver **Dr** (which is shown coupled between a supply voltage V_{dd} and ground). As may be appreciated, operation is similar to that of the circuit of **FIG. 10**, except that the isolation is via a transformer. It may also be understood that winding **Wx** is generalized, namely, it may be any transformer winding of appropriate polarity, provided it is closely coupled to the primary winding.

It is noted that while the embodiments of **FIGS. 9, 10, and 11** show only the freewheel rectifier being driven in response to the capacitively coupled timing signal from primary transistor **106**, this timing signal may also be used for triggering the drive of the forward rectifier, in essentially the same manner described for the embodiments of **FIGS. 3 and 7**. It is also noted that in the embodiments of **FIGS. 10 and 11**, in a practical implementation, the network coupling the sensed primary switch voltage to the input of the delay block may be modified by adding at the node that is clamped to ground another clamp to a voltage source (e.g., V_{dd}), thereby limiting the “high” value of the signal input to the delay block. Additionally, a resistor may be added between the coupling capacitor (e.g., **FIG. 10**, capacitor **206**) and the clamped node (e.g., **FIG. 10**, the anode of diode **208**) such that the RC time constant of the resistor and coupling capacitor is chosen to ensure that the coupling capacitor continues charging during the entire “off” time of primary transistor **106**, thus ensuring that the freewheeling synchronous rectifier is on during this entire period. A diode may be connected in parallel with this resistor to shunt it when the primary transistor is turned on (i.e., the diode's anode connected to the coupling capacitor terminal).

Prior to describing further illustrative embodiments, variations, and features of the present invention, with reference to the foregoing embodiments, it is important to note that the voltage appearing on secondary winding **108** cannot be used as the signal source for the drive circuit of the freewheel rectifier. In order for freewheel rectifier **112** to turn off, the signal at the input of freewheel rectifier driver **134** must go high. The secondary winding voltage, however, cannot go high unless freewheel rectifier **112** turns off. Consequently, if the voltage across secondary winding **108** (instead of primary winding **104**) were coupled as the signal source for driving freewheel rectifier **112**, freewheel rectifier **112** would latch on, permanently shorting the output of the converter. Such an inapplicability of the secondary winding voltage as a drive signal may be generalized to certain synchronous rectifiers of other topologies as well, wherein the synchronous rectifier cannot be turned off in response to the secondary winding voltage because it effectively shorts the secondary winding in response to the switching event (e.g., of a primary switch) when it should be turned off.

Referring now to **FIG. 12**, in accordance with another feature and embodiment of the present invention, circuitry may be added for generating a bias power supply **154**. Bias power supply **154** may be used for comparators and buffers, for example. Diode **156** and diode **158** form a bridge with the body diodes of forward rectifier **110** and freewheel rectifier **112**. The bridge rectifies the voltage across secondary winding **108**, and capacitor **160** filters the rectified voltage to generate bias power supply **154**. As may be appreciated, bias power supply **154** is advantageously generated from the secondary winding of transformer **102**, which provides increased immunity from variations in the input voltage (e.g., compared to the primary winding), as

well as galvanic isolation. Although in **FIG. 12** the bias power supply circuitry is shown for convenience as being implemented in a resonant reset forward converter of the general type described for the foregoing embodiments, those skilled in the art will understand that this technique for providing a bias power supply is applicable
5 regardless of whether synchronous rectification is employed, and is also well suited, for example, for clamped topologies.

FIG. 13 illustrates a flyback converter with synchronous rectification implemented in accordance with another embodiment of the present invention. In the case of a flyback converter, the timing of the synchronous rectification drive for the
10 flywheel rectifier is similar to the drive for the freewheel of the forward converter, and thus an essentially identical circuit can be used to drive it (the same circuit as shown in **FIG. 5**). It is again noted that V_{ref2} is proportional to the output current (e.g., secondary winding current) at the instant primary switch **106** is turned on, and preferably is also inversely proportional to the input voltage V_{in} . Alternatively, the timing signal can be
15 derived from the drive of the main switch (i.e., primary switch **106**) instead of from an auxiliary winding **124**; however, in this case, the information on the value of the input voltage is not available in the timing signal and will thus be lost, as the primary switch drive is generally regulated.

As may be appreciated from the foregoing illustrative embodiments, since
20 the delay required for optimal drive of the freewheel rectifier is directly proportional to the output current, the delay required at very low output currents may be very low. In certain cases, the reduction of the delay to the desired very low values may not be feasible due to the inherent delays in the drive circuits, and thus cross conduction of the

synchronous rectifiers may occur when the output current drops to low value. In accordance with another feature of the present invention, this problem can be overcome by making the amplitude of the gate drive signal proportional to the load current. As a result, as the load current decreases towards zero, the gate signal will eventually
5 vanish; at very light loads the operation of the synchronous rectifiers will cease and the possibility of cross conduction will be eliminated.

An additional important benefit of this approach is that the possibility of current reversal in the synchronous rectifiers is also eliminated, allowing direct parallel operation of synchronously rectified converters and eliminating the inherent positive
10 feedback and the possibility of sustained oscillations which occurs when converters using self driven synchronous rectifiers are connected in parallel. It is also important to recognize that since the load current will be low when the synchronous rectifiers do not operate, the reverse recovery current of the body diodes will be reduced to insignificant values such that their effects will be negligible and/or tolerable.

An embodiment implementing such amplitude modulation of the drive
15 signal as a function of the load current for a synchronous rectifier in a resonant reset forward converter is shown in FIG. 14. A filter circuit consisting of resistor 16 and capacitor 15 extracts a DC voltage drop across the ohmic resistance of output inductor 114, thus providing to the non-inverting input of amplifier 19 a voltage that is
20 proportional to the output load current. Amplifier 19 amplifies this voltage, and the output voltage of amplifier 19 is used to provide the bias voltage for the drivers 130 and 134. The gain of amplifier 19, set by resistors 18 and 17, will determine the percentage

of load at which the amplifier will saturate and its output voltage will cease to be proportional to the load current.

In alternative embodiments, the output current may be sensed using any of a variety of other methods, such as shunts, current transformers, etc. Additionally, the amplitude modulation may be generated according to any of variety of linear or non-linear functions of the output current, and possibly other circuit parameters as well (e.g., input voltage). Moreover, those familiar with the art will also recognize that modulating the amplitude of the drive signal as a function of the output current may be advantageously implemented in any of the embodiments described herein, as well as in any other synchronous rectifier drive circuits, including the self driven type.

In view of the foregoing description, those skilled in the art will also understand that the applicability of the above-described embodiments may readily be extended to double ended topologies, such as phase shifted bridges, conventional full and half bridges, etc. The extension may be understood, for example, by viewing double ended topologies as two sequentially operated single ended converters that share the transformer and the output filter.

FIG. 15 depicts a generic double ended converter with a center-tapped secondary, implemented with synchronous rectifiers in accordance with an embodiment of the present invention. For the positive polarity interval of input voltage **168**, the converter may be viewed as a forward converter comprising primary winding **162** and secondary winding **164** of transformer **166**, with switches (synchronous rectifiers) **170** and **172** playing the role of forward rectifier **110** and freewheel rectifier **112**, respectively. When the polarity of the input voltage reverses, the roles of the switches

reverse, and the converter may be viewed as being operational as a second single ended converter, comprising primary winding **162** and secondary winding **163**.

It is noted that when synchronous rectifier **170** operates as the forward rectifier for winding **164**, it can also be considered to be the freewheel rectifier for winding **163**, and synchronous rectifier **172** plays a corresponding role for windings **163** and **164**, respectively. During the time when the voltage across winding **162** is zero, both devices **170** and **172** act as freewheeling rectifiers. Consequently, rectifier **170** must be on when the voltage across winding **162** is either zero or positive, and rectifier **172** must be on when the voltage on winding **162** is zero or negative. Drive timing for synchronous rectifiers **170** and **172** is respectively provided by sense windings **174** and **173**, which make up a center-tapped auxiliary winding of transformer **166**, which, as indicated previously in describing various single-ended embodiments, should be closely coupled to primary winding **162**. The timing signals derived from these windings are respectively coupled to drivers **171** and **179** via diodes **175** and **177** delay blocks **176** and **178**, which delay blocks may impose appropriate delays as described above (e.g., delays that cause the synchronous rectifiers to be turned off when the current through their respective channels is insubstantial, the delays being based, for example, on the output current that flows prior to the input polarity switching and on the discharge-related voltage).

Accordingly, it is appreciated that the operation of the circuit of **FIG. 15** is essentially equivalent to the operation of the single ended circuit shown in **FIG. 3**, and also may readily be modified to operate in a manner similar to the illustrative circuits

shown in **FIGS. 6, 7, and 9-11**. Further, those versed in the art will understand how to extend these circuits to any double-ended configuration.

FIG. 16 illustrates a double-ended clamped type converter, such as that described in Soviet Patent No. 892,614 to A.G. Polikarpov et al., published December 23, 1981, implemented to include synchronous rectification in accordance with an embodiment of the present invention. As shown, the "Polikarpov type" converter has two rectifiers: rectifier **180** that conducts when switch **182** is on and rectifier **184** that conducts when switch **186** is on, switches **182** and **186** being switched on mutually exclusively. In this embodiment, the timing signal for driving the rectifiers is derived by using a center-tapped auxiliary winding **188** closely coupled to primary winding **187** of transformer **186**. The timing of the drive signal for controlling rectifier **180** is essentially identical to the drive timing employed in the forward converter of **FIG. 3**. The case of rectifier **184**, however, is different. Specifically, since there is a substantial amount of magnetizing current charging the snubbing capacitance **183** (e.g., providing zero-voltage switching (ZVS)), the delay is no longer constant, and a different timing strategy must be used. Since in this case, turning on switch **186** forces a voltage that commutates the current in the rectifiers, a timing arrangement similar to the one used to turn off rectifier **180** may be used.

FIG. 17 illustrates an embodiment of a timing circuit for switching rectifiers **180** and **184** of the Polikarpov type converter of **FIG. 16** in response to a signal representative of the voltage across primary winding **187** as sensed by winding **188**. As shown, the timing circuit includes two similar circuit sections for respectively driving inputs **X** and **Y** of rectifiers **180** and **184**, the circuit sections comprising diodes **D_x** and

D_Y , transistors Q_X and Q_Y , base resistors R_{X2} and R_{Y2} , resistors R_{X1} and R_{Y1} , capacitors C_X and C_Y , and comparators **220** and **222**. A variable reference signal V_{refX} proportional to the secondary current I_{secY} that flows through the secondary winding at the turn on of switch **182** is input to the non-inverting input of comparator **220**, whereas a variable reference signal V_{refY} proportional to the secondary current I_{secX} that flows through the secondary winding at the turn on of switch **186** is input to the non-inverting input of comparator **222**. Each of these variable reference signals is also advantageously inversely proportional to the discharge related voltage (e.g., the input voltage). As described for the circuit of **FIG. 5**, these variable reference signals provide for the variable delay times to turnoff rectifiers **180** and **184**, but do not substantially affect the rapid turn-on of the rectifiers. The approach for timing control embodied in **FIG. 17** works well for Polikarpov type clamped converters (or Lambda's PH circuit), though it requires a center tapped sense winding **188** to sense the voltage.

As may be appreciated, for each of the synchronous rectifiers driven in accordance with the present invention in the foregoing illustrative embodiments, both turn-on and turn-off are driven in response to the timing signal representative of the primary winding voltage (or primary switch voltage). As noted above, implementations of the present invention need not drive all switching transitions of all synchronous rectifiers in response to a signal representative of the primary winding voltage. Various embodiments above do show driving only the freewheel rectifier (i.e., and not the forward rectifier) in this manner.

In certain applications, however, driving both turn-on and turn-off of a synchronous rectifier based on a signal coupled to the primary may adversely affect

circuit operation. For example, if such a drive signal is derived by capacitive coupling to the primary side, a transient voltage appearing between the primary and secondary sides of the converter may cause unintentional switching transitions that can severely degrade performance and may be catastrophic. More specifically, if capacitive coupling to the primary were used to provide the turn-on drive, then a primary side transient event (coupled over the turn-on drive path) that unintentionally turned on the synchronous rectifier at a time when it should be in an off state may cause a disruptive short circuit across the transformer. In accordance with another feature and embodiment of the present invention, this disruption is avoided by not coupling a timing signal from the primary side to control turn-on; only turn-off is driven based on a signal coupled to the primary. It is appreciated that since the primary winding voltage is only coupled to the rectifiers for controlling turn-off, a transient event that unintentionally signal turnoff of the synchronous rectifier will not cause any shorting, or other potentially severe event. More specifically, if a transient event on the primary side were coupled via the turn-off drive path at a time when the synchronous rectifier should be on, then this transient event may cause the synchronous rectifier to unintentionally turn-off. Since, however, the rectifier's body diode could carry the current that passed through the rectifier switch (e.g., through the MOSFET channel), this unintentional turn off will have no significant adverse effect on converter operation.

An illustrative embodiment is shown in **FIG. 18**, wherein only the turn-off of synchronous rectifier **318** is driven in response to a timing signal representative of the primary winding voltage (as this terminology is used herein; e.g., a timing signal coupled to the primary side); turn-on of synchronous rectifier **318** is in response to the secondary

winding voltage. Freewheel synchronous rectifier **318** is capacitively charged during the positive transition at the drain of forward rectifier **307** via capacitor **317** and diode **314**; diode **316** provides a discharge path for capacitor **317**. Due to the presence of diode **314**, transistor **318** will stay on even if the voltage at the drain of transistor **307** drops to zero. Transistor (freewheel rectifier) **318** will turn off when a negative transition would take place at the drain of primary transistor **305**. When transistor **305** turns off, its drain voltage goes positive and capacitor **304** is charged via resistor **309**. Diode **313** protects the base-emitter junction of transistor **315** against excessive voltage. Diode **311** clamps the voltage that develops at the cathode of diode **313** to a safe value determined by the voltage source **312**. When transistor **305** turns on, capacitor **304** will turn on transistor **315** via diodes **308** and **313**, thereby turning of the freewheel rectifier **318**. It is noted that capacitor **306** represents the common mode capacitors of the EMI filtering typically present in a practical converter. The circuit shown here is just one possible embodiment, and those skilled in the art will recognize that the principle of turning the freewheel rectifier on by a signal available in the secondary of the converter and turning it off by a signal capacitively coupled from the primary of the converter can be implemented by a multitude of other circuits using a variety of devices. It is also understood that the circuit presented here can be enhanced by using the mechanisms that would generate the optimal delay at the turn off, as explained herein.

As may be appreciated, alternative embodiments may trigger only turn-on in response to a signal representative of the primary switch voltage (e.g., primary winding voltage), with the triggering signal for turnoff of the given rectifier being derived independently of a voltage representative of the primary winding voltage or primary

switch voltage (e.g., from a secondary winding). As described, however, in various applications implementing only turnoff may be advantageous, particularly where capacitive coupling of a primary side voltage is used to provide the timing signal for driving the synchronous rectifier. Another advantage of such a configuration in which only turn-off drive is generated in response to a primary side voltage signal is that, in certain applications such as described hereinabove for various embodiments of the present invention, the timing of rectifier turn-off is generally more critical than its turn-on timing. Using this timing signal for at least turn-off of a freewheel (or flywheel) rectifier is also advantageous because it negates any limitation to clamped topologies.

In accordance with the foregoing description of illustrative embodiments of the present invention, and illustrative variations or modifications thereof, it may be appreciated that the present invention provides many features, advantages and attendant advantages, including the following illustrative features and advantages. For example, because it is sensitive to and indicative of the beginning of the commutation intervals, a timing signal for synchronous rectification generated according to the present invention allows for optimum timing of synchronous rectifier turn-off to reduce or eliminate reverse recovery effects, as well as cross-conduction and short circuit conditions. Additionally, since the present invention provides a timing signal that is representative of the primary winding or switch voltage to trigger turn-on and/or turn-off of a synchronous rectifier coupled to the secondary transformer winding, the switching control is, *a fortiori*, not dependent only on a voltage developed across the secondary transformer winding, and thus the present invention is not limited to clamped topologies, but may be implemented in myriad topologies. Simply stated, synchronous rectifier

control according to the present invention may be implemented in converter topologies regardless of whether active clamping is used; notably, the self driven circuits of the art described in the background section hereinabove will drive the freewheel rectifier correctly only if active clamping is available. It is also appreciated, that the general applicability of synchronous rectifier control according to the present invention applies not only to generating a timing signal, but also to generating a drive signal having a turn-off delay approximately equal to the applicable commutation intervals.

Another feature that may be associated with the present invention relates to modulating the drive signal amplitude as a function of the load (output) current, which not only advantageously avoids cross conduction at light loads, but also eliminates the possibility of current reversal in the synchronous rectifiers, thus allowing direct parallel operation of synchronously rectified converters and eliminating the inherent positive feedback and the possibility of sustained oscillations which occurs when converters using self driven synchronous rectifiers are connected in parallel.

Those skilled in the art will also understand that while synchronous rectifier control according to the present invention has been described for various isolated forward, flyback, and double-ended topologies, advantageously, it may be implemented in not only other isolated topologies, but non-isolated converter topologies (e.g., buck or buck-boost) as well. It is noted that in the case of non-isolated converters, no leakage inductance is present and the commutation period is very short, and thus the drive delays have to be minimized in order to avoid cross conduction. Under these conditions, the modulation of the drive amplitude is particularly beneficial, as it allows the faster turn off of the synchronous rectifiers when the output load of the converter is

light. In addition, the amplitude modulation of the drive eliminates the possibility of current reversal in the synchronous rectifiers' channels, thereby allowing direct parallel connection of these converters.

It may also be understood that the present invention may be applied advantageously to another family of rectification circuits known as "current doublers", which family is widely used in conjunction with actively clamped single ended converters. As the drive requirements (in terms of both timing and delays) for the two rectifiers associated with these circuits are essentially identical to the drive requirements of the conventional forward and freewheel rectifiers discussed hereinabove, the circuits and techniques presented herein will apply directly for converters employing current doubling techniques.

Accurate Limitation of Maximum Duty Cycle PWM Controllers

FIG. 19 shows an illustrative embodiment of the present invention implemented with a Unitrode UC3825 High Speed PWM controller IC (integrated circuit) 50, which is described in Unitrode Corporation's Product Data Sheet/Application Information for UC1825/UC2825/UC3825 (UC1825 family) High Speed PWM Controller, which is incorporated by reference herein. Such a controller IC 50 is optimized for high frequency switched mode power supply applications. For clarity of exposition, **FIG. 19** does not expressly show all connections (e.g., of power supplies, error-amplifier feedback loop elements, etc.) to the controller IC, as such details are not necessary for understanding the present invention and are also well known to ordinarily skilled artisans and may be further understood by reference to the Unitrode data sheets, supra.

As shown, controller IC 20 includes: an oscillator circuit 20, having input pins RT 5 and CT 6 and clock output available at pin 4; a PWM Latch 36; error amplifier (Error Amp) 24, having noninverting and inverting inputs as pin NI 2 and INV 1; a comparator 22, having a Ramp input pin 7; a toggle flip-flop 26; NOR gates 28 and 30; and output drivers 32 and 34. Pin RT 5 is connected to ground via resistor R1, and is connected to the output of driver 34 (i.e., Out B pin 14) via a series connection of resistor R2 and diode D1. A timing capacitor C1 is connected between ground and input pin CT 6 which is connected to Ramp input pin 7 of comparator 22.

Generally, operation of IC50 is as follows. The current that flows out of RT pin 5 charges capacitor C1 that is coupled to pin CT 6 until the voltage on capacitor C1 reaches a predetermined value (e.g., 2.8 V), at which point the capacitor C1 is rapidly (i.e., relative to the charging time) discharged. Accordingly, a sawtooth type voltage wave form is generated at pin 6. As shown, this sawtooth wave form signal is input via ramp input pin 7 to the non-inverting input of comparator 22. The inverting input receives the signal from the output of error amplifier 24. Accordingly, when the ramp input signal to comparator 22 exceeds the error signal provided by error amplifier 24, the output of comparator 22 is high, thus providing a set signal to the S input of PWM latch S, which is operative in providing a short delay when the sawtooth wave form rapidly discharges. The pulse signal that is output by PWM latch 36 is coupled to toggle flip flop 26 and to NOR gates 28 and 30. In accordance with a conventional use of IC 50 to drive a push pull converter, toggle flip flop 26 is operative in ensuring that the output drivers 32 and 34 do not conduct together and that the duty cycle of each drive signal output from drivers 32 and 34 do not exceed 50%. In effect, toggle flip flop 26

provides respective drive signals from drivers 32 and 34 that have a frequency that is half of the oscillator 20.

In accordance with the present invention, as implemented in the embodiment of **FIG. 19** where a conventional PWM controller IC is modified, the charging time of the sawtooth generator is modified for alternative successive ramps of the sawtooth voltage waveform. In the embodiment of **FIG. 19**, such an alternating charging time is provided by alternately modifying the resistance that determines the charging current. As shown, the series connection of resistance R2 and diode D1 is coupled between oscillator charging current pin RT5 and Out B pin 14. Thus, while the signal at Out B pin 14 is high, the charging current is established only by resistance R1, and while the signal at Out B pin 14 is low, the charging current is established by the parallel connection of resistance R1 and resistance R2. Accordingly, the maximum duty cycle is established by the ratio of the charging currents into successive ramps of the sawtooth waveform. For example, if resistances R1 and R2 were equal, then the charging current determined by R1 only will be half the charging current determined by both R1 and R2 in parallel, resulting in a maximum duty cycle of two thirds (i.e., about 67%) (or complementary duty cycle of one third).

An important feature of the present invention is that the maximum duty cycle is very stable over a wide range of operating temperatures, as it may be appreciated that the duty cycle is established according to the ratio of resistances that control the charging time, and these resistances can have very high tolerance temperature coefficients which are very closely matched. **FIG. 20** shows a oscilloscope trace for an experiment performed using the embodiment of **FIG. 19**, with resistances

R1 and R2 both equal to 15.4 kohm and capacitor C1 equal to 490 pf, and with the error amplifier inputs connected to provide the maximum duty cycle at the output. As shown, voltage waveform V2 is a sawtooth having alternating ramp rates. Also, the duty cycle of output signal V1 measured at Out A pin 11 has a duty cycle of approximately 67%,
5 with a period equal to about 8 microseconds. Measurements for the circuit were taken at ambient temperature, 30°C, 50°C and 70°C demonstrated very high temperature stability of the duty cycle.

As may be appreciated, the above-described embodiments and examples are merely illustrative of the present invention, which is not limited thereto. For example, it may be appreciated that while in the embodiment of **FIG. 19**, modifying the resistance modifies the charging time by modifying the current of a current source, alternative embodiments of the present invention may modify the charging time by modifying an RC time constant, as the oscillator may be implemented in various ways. Also, while the above embodiment employs an UC3825, the present invention may be
10 implemented by using myriad such commercially available PWM ICs. It is also understood that although the present invention is well suited for implementation with such commercially available PWM control ICs, it may be practiced in myriad other circuit designs (e.g., discrete circuitry, application specific ICs (ASICs), etc.) which employ impedance controlled charging (e.g., integrator type circuitry) to provide an oscillator
15 waveform that determines the maximum duty cycle. Further, while the above embodiment shows increasing the charging current during a period while the output coupled to the complementary output of the flip flop is low, alternative implementations may decrease the charging current during this interval (state), or similarly may instead
20

increase the charging current during the opposite state. Simply, various implementations of the present invention may modify a resistance in successive intervals (states) to achieve different charging times in different ways (sourcing or sinking current, adding to or shunting some of the charging current, etc.).

5 Accordingly, although the above description of illustrative embodiments of the present invention, as well as various illustrative modifications and features thereof, provides many specificities, these enabling details should not be construed as limiting the scope of the invention, and it will be readily understood by those persons skilled in the art that the present invention is susceptible to many modifications, adaptations, and
10 equivalent implementations without departing from this scope and without diminishing its attendant advantages. It is therefore intended that the present invention is not limited to the disclosed embodiments but should be defined in accordance with the claims which follow.

I claim:

1. A power converter, comprising:
 - a primary switch that repetitively switches between a conductive state and a substantially non-conductive state to selectively connect an input of said power converter to an electrical power source;
 - a detection circuit that senses the approximate switch timing of said primary switch to provide a timing signal representative of the primary switch timing; and
 - a rectifier device that includes a conduction control terminal and a bi-directional conduction path selectively enabled by said conduction control terminal, such that when said conduction control terminal is driven ON said bi-directional conduction path is activated to conduct an output current provided to an output of said power converter, and when said conduction control terminal is driven OFF said bi-directional conduction path is de-activated, wherein said conduction control terminal is driven OFF based on said timing signal to de-activate said bi-directional conduction path.
2. The power converter according to claim 1, wherein said conduction control terminal is driven OFF relative to said timing signal at a delay time when the output current conducted by said bi-directional conduction path to said output reduces to a substantially negligible amount.
3. The power converter according to claim 2, wherein said delay time is a function of the output current.

4. The power converter according to claim 3, wherein said delay time is a function of the voltage of said electrical power source.
5. The power converter according to claim 1, wherein said rectifier is driven ON based on a second timing signal that is independent of any timing signal representative of the switching time of said primary switch.
6. The power converter according to claim 5, wherein said second timing signal, at least during times when said timing signal transitions between levels corresponding to the primary switch switching between the conductive state and the substantially non-conductive state, is not substantially in phase with nor substantially a mirror of the approximate switch timing of said primary switch.
7. The power converter according to claim 1, wherein said rectifier is driven ON based on said timing signal.
8. The power converter according to claim 1, wherein the amplitude of a drive signal applied to said conduction control terminal to drive the rectifier ON is modulated as a function of the output current, such that when the output current decreases below an approximate threshold the drive signal is incapable of driving the rectifier ON in response to said second timing signal, said rectifier thereby being maintained OFF while the output current is below the approximate threshold.
9. The power converter according to claim 1, further comprising a transformer having a primary winding and a secondary winding, wherein said primary winding is connected to said input such that said primary switch selectively couples the

primary winding to said electrical power source, said secondary winding selectively conducts the output current, and said rectifier is connected to said secondary winding.

10. The power converter according to claim 9, wherein said detection circuit includes an auxiliary winding of said transformer closely coupled to said primary winding to sense the voltage across said primary winding, said timing signal corresponding to a sense voltage induced in said auxiliary winding.
11. The power converter according to claim 10, further comprising a capacitor that capacitively couples said sense voltage induced in said auxiliary winding to provide a drive signal that drives said conduction control terminal of said rectifier.
12. The power converter according to claim 10, wherein said voltage induced in said auxiliary winding is conductively coupled to said conduction control terminal of said rectifier.
13. The power converter according to claim 12, further comprising a driver having an output that drives said conduction control terminal and an input that is conductively coupled to said auxiliary winding.
14. The power converter according to claim 9, wherein said detection circuit includes a capacitor that is coupled to the voltage across said primary switch to provide said timing signal.
15. The power converter according to claim 14, wherein said primary switch is a MOSFET having a drain terminal, a source terminal, and a gate terminal that is

the conduction control terminal, and said capacitor is conductively connected to the drain of said MOSFET.

16. The power converter according to claim 9, wherein said detection circuit includes a capacitor that is coupled to a control terminal of said primary switch to provide said timing signal, said control terminal operative to selectively enable said conductive state and said substantially non-conductive state.
17. The power converter according to claim 16, wherein said primary switch is a MOSFET that is connected in series with said primary winding and has a gate terminal that is said control terminal, and wherein said capacitor is conductively connected to the gate terminal.
18. The power converter according to claim 9, wherein said detection circuit includes a second transformer having a sense winding connected to a control terminal of said primary switch, and a drive winding closely coupled to said sense winding, said timing signal corresponding to the voltage induced in said drive winding based on the voltage waveform on said control terminal, wherein said control terminal is operative to selectively enable said conductive state and said substantially non-conductive state.
19. The power converter according to claim 9, wherein said rectifier conducts the output current when said primary switch is in the substantially non-conductive state, and wherein said rectifier is driven OFF in response to said timing signal transitioning between levels corresponding to the primary switch switching from the substantially non-conductive state to the conductive state.

20. The power converter according to claim 19, wherein said rectifier is driven ON in response to said timing signal transitioning between levels corresponding to the primary switch switching from the conductive state to the substantially non-conductive state.
21. The power converter according to claim 19, wherein said conduction control terminal is driven OFF relative to said timing signal transitioning between levels corresponding to the primary switch switching from the substantially non-conductive state to the conductive state at a delay time when the output current conducted by said bi-directional conduction path to said output reduces to a substantially negligible amount.
22. The power converter according to claim 21, wherein said delay time is a function of the output current.
23. The power converter according to claim 22, wherein said delay time is a function of the voltage of said electrical power source.
24. The power converter according to claim 9, wherein said rectifier conducts the output current when said primary switch is in the conductive state, and wherein said rectifier is driven OFF in response to said timing signal transitioning between levels corresponding to the primary switch switching from the conductive state to the substantially non-conductive state
25. The power converter according to claim 24, wherein said rectifier is driven ON in response to said timing signal transitioning between levels corresponding to the

primary switch switching from the substantially non-conductive state to the conductive state.

26. The power converter according to claim 24, wherein said conduction control terminal is driven OFF relative to said timing signal transitioning between levels corresponding to the primary switch switching from the conductive state to the substantially non-conductive state at a delay time when the output current conducted by said bi-directional conduction path to said output reduces to a substantially negligible amount.
27. The power converter according to claim 26, wherein said delay time is a function of the output current.
28. The power converter according to claim 27, wherein said delay time is a function of the voltage of said electrical power source.
29. The power converter according to claim 9, further comprising a second rectifier connected to said secondary winding.
30. The power converter according to claim 29, wherein said second rectifier is a passive diode that conducts the output current when said primary switch is in the conductive state, wherein said rectifier conducts the output current when said primary switch is in the substantially non-conductive state, said rectifier is driven OFF in response to said timing signal transitioning between levels corresponding to the primary switch switching from the substantially non-conductive state to the conductive state, and wherein the output current commutates between said

rectifier and said second rectifier when the primary switch switches between the substantially non-conductive state and the conductive state.

31. The power converter according to claim 29, wherein said second rectifier is an active switch device that conducts the output current when said primary switch is in the conductive state, said rectifier conducts the output current when said primary switch is in the substantially non-conductive state, said second rectifier is driven OFF to selectively de-activate conduction of the output current by the second rectifier in response to said timing signal transitioning between levels corresponding to the primary switch switching from the conductive state to the substantially non-conductive state, and said rectifier is driven OFF in response to said timing signal transitioning between levels corresponding to the primary switch switching from the substantially non-conductive state to the conductive state, and wherein the output current commutates between said rectifier and said second rectifier when the primary switch switches between the substantially non-conductive state and the conductive state.

32. The power converter according to claim 31, wherein said second rectifier is driven ON to selectively activate conduction of the output current by the second rectifier in response to said timing signal transitioning between levels corresponding to the primary switch switching from the substantially non-conductive state to the conductive state, and wherein said rectifier is driven ON in response to said timing signal transitioning between levels corresponding to the primary switch switching from the conductive state to the substantially non-conductive state.

33. The power converter according to claim 32, wherein said conduction control terminal is driven OFF relative to said timing signal transitioning between levels corresponding to the primary switch switching from the substantially non-conductive state to the conductive state at a first delay time when the output current conducted by said bi-directional conduction path to said output reduces to a substantially negligible amount, and wherein said second rectifier is driven OFF relative to said timing signal transitioning between levels corresponding to the primary switch switching from the conductive state to the substantially non-conductive state at a second delay time when the output current conducted by said second rectifier reduces to a substantially negligible amount.
34. The power converter according to claim 33, wherein said first delay is a function of the value of said output current at approximately the instant prior to said primary switch switching from the substantially non-conductive state to the conductive state.
35. The power converter according to claim 34, wherein said second delay is a constant delay.
36. The power converter according to claim 32, wherein said power converter is a forward converter, said second rectifier is a forward rectifier, and said rectifier is a flywheel rectifier.
37. The power converter according to claim 36, wherein said power converter is a resonant reset forward converter.

38. The power converter according to claim 9, wherein the topology of said power converter is selected from the group consisting of forward, flyback, double-ended, and Polykarpov-type.
39. The power converter according to claim 9, wherein said power converter is a resonant reset forward converter and said rectifier is a flywheel rectifier.
40. A system comprising a power converter as recited in claim 1.
41. The system according to claim 40, wherein said system is a power supply.
42. A power converter comprising:
- a primary switch that repetitively switches between a conductive state and a substantially non-conductive state to selectively connect an input of said power converter to an electrical power source;
 - a rectifier that includes a conduction control terminal and a bi-directional conduction path selectively enabled by said conduction control terminal, such that when said conduction control terminal is driven ON said bi-directional conduction path is activated to conduct an output current provided to an output of said power converter, and when said conduction control terminal is driven OFF said bi-directional conduction path is de-activated; and
 - a drive control circuit that provides a timing signal representative of the approximate switch timing of said primary switch and that, based on said timing signal, drives said conduction control terminal OFF to de-activate said bi-directional conduction path.

43. The power converter according to claim 42, wherein said drive control circuit drives said conduction control terminal OFF relative to said timing signal at a delay time when the output current conducted by said bi-directional conduction path to said output reduces to a substantially negligible amount.
44. The power converter according to claim 42, further comprising a driver having an output that drives said conduction control terminal and an input that is coupled to said timing signal.
45. A power converter having an output coupled to a synchronous rectifier that selectively conducts an output current to the output, said power converter comprising:
- means for sensing the approximate switch timing of a switch coupled to an input of said power converter to provide a timing signal representative of the switch timing; and
 - means for driving said synchronous rectifier OFF in response to said timing signal to disable conduction of the output current by a bi-directional conduction path of said synchronous rectifier.
46. The power converter according to claim 45, further comprising a transformer having a primary winding and a secondary winding, wherein said primary winding is coupled to said input and said switch, said secondary winding selectively conducts the output current, and said synchronous rectifier is connected to said secondary winding.

47. The power converter according to claim 46, wherein said means for sensing includes an auxiliary winding of said transformer closely coupled to said primary winding to sense the voltage across said primary winding, said timing signal corresponding to a sense voltage induced in said auxiliary winding.
48. The power converter according to claim 47, further comprising a capacitor that capacitively couples the sense voltage sensed by said means for sensing to said means for driving.
49. The power converter according to claim 46, wherein said means for sensing includes a capacitor that is coupled to said switch to provide said timing signal.
50. The power converter according to claim 46, wherein said means for sensing includes a second transformer having a sense winding connected to a control terminal of said primary switch, and a drive winding closely coupled to said sense winding, said timing signal corresponding to the voltage induced in said drive winding based on the voltage waveform on said control terminal, wherein said control terminal is operative to selectively turn said switch ON and OFF.
51. The power converter according to claim 46, wherein said means for driving drives said synchronous rectifier OFF relative to said timing signal transitioning between levels corresponding to the switch switching between an ON state and an OFF state at a delay time when the output current conducted by said bi-directional conduction path to said output reduces to a substantially negligible amount.

52. The power converter according to claim 51, wherein said delay time is a function of the output current.
53. The power converter according to claim 52, wherein said switch selectively couples said primary winding to an electrical power source, and said delay time is a function of the voltage of said electrical power source.
54. The power converter according to claim 51, wherein said synchronous rectifier conducts the output current when said switch is in the ON state, and wherein said means for driving drives said synchronous rectifier OFF in response to said timing signal transitioning between levels corresponding to the switch switching from the ON state to the OFF state.
55. The power converter according to claim 51, wherein said synchronous rectifier conducts the output current when said switch is in the OFF state, and wherein said means for driving drives said synchronous rectifier OFF in response to said timing signal transitioning between levels corresponding to the switch switching from the OFF state to the ON state.
56. The power converter according to claim 46, further comprising a second rectifier connected to said secondary winding to selectively conduct the output current when the synchronous rectifier is OFF.
57. The power converter according to claim 56, wherein said second rectifier is an active switch device having a bi-directional conduction path that conducts the output current when said switch is in the conductive state, said power converter

further comprising a means for driving said second rectifier OFF in response to said timing signal to disable conduction of the output current by the bi-directional conduction path of said second rectifier, and wherein said synchronous rectifier conducts the output current when said switch is in an OFF state, said means for driving said second rectifier drives said second rectifier OFF to selectively de-activate conduction of the output current by the bi-directional conduction path of said second rectifier in response to said timing signal transitioning between levels corresponding to the switch switching from an ON state to the OFF state, and said means for driving said synchronous rectifier drives said synchronous rectifier OFF in response to said timing signal transitioning between levels corresponding to the switch switching from the OFF state to the ON state, and wherein the output current commutates between said synchronous rectifier and said second rectifier when the switch switches between the OFF state and the ON state.

58. The power converter according to claim 57, wherein said means for driving said synchronous rectifier drives the synchronous rectifier OFF relative to said timing signal transitioning between levels corresponding to the switch switching from the OFF state to the ON state at a first delay time when the output current conducted to the output by the bi-directional conduction path of said synchronous rectifier reduces to a substantially negligible amount, and wherein said means for driving said second rectifier drives the second rectifier OFF relative to said timing signal transitioning between levels corresponding to the switch switching from the ON

state to the OFF state at a second delay time when the output current conducted by said second rectifier reduces to a substantially negligible amount.

59. The power converter according to claim 58, wherein said power converter is a forward converter, said second rectifier is a forward rectifier, and said synchronous rectifier is a flywheel rectifier.
60. The power converter according to claim 46, wherein said power converter is a resonant reset forward converter.
61. A method for driving a synchronous rectifier that selectively conducts an output current to the output of a power converter, said method comprising:
 - sensing the approximate switch timing of a switch coupled to an input of said power converter to provide a timing signal representative of the switch timing; and
 - driving said synchronous rectifier OFF in response to said timing signal to disable conduction of the output current by a bi-directional conduction path of said synchronous rectifier.
62. The method according to claim 61, wherein the power supply includes a transformer having a primary winding and a secondary winding, wherein said primary winding is coupled to said input and said switch, said secondary winding selectively conducts the output current, and said synchronous rectifier is connected to said secondary winding.

63. The method according to claim 62, wherein said sensing includes sensing the voltage across said primary winding.
64. The method according to claim 63 further comprising capacitively coupling the voltage sensed across said primary winding to provide a drive signal for said synchronous rectifier.
65. The method according to claim 62, wherein said sensing includes coupling a capacitor to said switch to provide said timing signal.
66. The method according to claim 62, wherein said sensing includes connecting a sense winding of a second transformer to a control terminal of said switch, said second transformer having a drive winding closely coupled to said sense winding, said timing signal corresponding to the voltage induced in said drive winding based on the voltage waveform on said control terminal, wherein said control terminal is operative to selectively turn said switch ON and OFF.
67. The method according to claim 62, wherein said driving includes driving said synchronous rectifier OFF relative to said timing signal transitioning between levels corresponding to the switch switching between an ON state and an OFF state at a delay time when the output current conducted by said bi-directional conduction path to said output reduces to a substantially negligible amount.
68. The method according to claim 67, wherein said delay time is generated as a function of the output current.

69. The method according to claim 68, wherein said switch selectively couples said primary winding to an electrical power source, and said delay time is a function of the voltage of said electrical power source.
70. The method according to claim 67, wherein said synchronous rectifier conducts the output current when said switch is in the ON state, and wherein said synchronous rectifier is driven OFF in response to said timing signal transitioning between levels corresponding to the switch switching from the ON state to the OFF state.
71. The method according to claim 67, wherein said synchronous rectifier conducts the output current when said switch is in the OFF state, and wherein said synchronous rectifier is driven OFF in response to said timing signal transitioning between levels corresponding to the switch switching from the OFF state to the ON state.
72. The method according to claim 62, further comprising providing a second rectifier connected to said secondary winding to selectively conduct the output current when the synchronous rectifier is OFF.
73. The method according to claim 72, wherein said second rectifier is an active switch device having a bi-directional conduction path that conducts the output current when said switch is in the conductive state, said method further comprising driving said second rectifier OFF in response to said timing signal to disable conduction of the output current by the bi-directional conduction path of said second rectifier, and wherein said synchronous rectifier conducts the output

current when said switch is in an OFF state, said second rectifier being driven OFF to selectively de-activate conduction of the output current by the bi-directional conduction path of said second rectifier in response to said timing signal transitioning between levels corresponding to the switch switching from an ON state to the OFF state, and said synchronous rectifier being driven OFF in response to said timing signal transitioning between levels corresponding to the switch switching from the OFF state to the ON state, and wherein the output current commutates between said synchronous rectifier and said second rectifier when the switch switches between the OFF state and the ON state.

74. The method according to claim 73, wherein said synchronous rectifier is driven OFF relative to said timing signal transitioning between levels corresponding to the switch switching from the OFF state to the ON state at a first delay time when the output current conducted to the output by the bi-directional conduction path of said synchronous rectifier reduces to a substantially negligible amount, and wherein said second rectifier is driven OFF relative to said timing signal transitioning between levels corresponding to the switch switching from the ON state to the OFF state at a second delay time when the output current conducted by said second rectifier reduces to a substantially negligible amount.
75. The method according to claim 62, wherein said power converter is a resonant reset forward converter.
76. The method according to claim 62, wherein said synchronous rectifier is driven ON in response to a timing signal that is independent of said timing signal, turn

ON and turn OFF of the synchronous rectifier thereby being driven independently.

77. The method according to claim 76, wherein said second timing signal is derived from said secondary winding.
78. The method according to claim 76, wherein said timing signal is capacitively coupled to the synchronous rectifier.
79. The method according to claim 62, further comprising driving said synchronous rectifier ON by applying a drive signal having an amplitude that is modulated as a function of the output current, such that when the output current decreases below an approximate threshold the drive signal is incapable of driving the synchronous rectifier ON, said synchronous rectifier thereby being maintained OFF while the output current is below the approximate threshold.
80. A converter that provides an output and a bias power supply, comprising:
 - a transformer having a primary winding and a secondary winding;
 - a primary switch that couples the primary winding to an electrical power source;
 - a freewheeling rectifier and a forward rectifier coupled to said output;
 - a first rectifier device that permits unidirectional current flow from a first end of the secondary winding to a node that provides the bias power supply;
 - a second diode that permits unidirectional current flow from a second end of the secondary winding of the transformer to said node; and
 - wherein the first and second diodes form a bridge with the forward rectifier

and the flywheel rectifier to provide the bias power supply in response to the primary switch repetitively coupling the primary winding to the electrical power source.

81. A method for establishing a maximum duty cycle for a pulse width modulator, comprising:

generating a substantially sawtooth waveform signal by providing a first average charging current and a second average charging current in successive, alternating respective first and second time intervals, said first and second time intervals determined by the respective time required for the respective first and second average charging currents to charge to a first voltage value, said first and second average charging currents respectively determined by a first impedance and a second impedance; and

switching between said first impedance and said second impedance in response to said substantially sawtooth waveform signal.

82. The method according to claim 81, wherein said switching is performed in response to an output generated by a bistable circuit that is responsive to said substantially sawtooth waveform signal.

ABSTRACT

A method and system for providing synchronous rectification in power converters that includes controlling turnoff of a synchronous rectifier according to a timing signal representative of the switching time of a switch that is coupled to input of the power converter. Such a timing signal may be obtained directly or indirectly in various ways; for example, by sensing the voltage across the primary switch, or by sensing the drive voltage of the primary switch. Additional alternatives in an isolated converter having a transformer with a primary winding that is selectively coupled to the electrical power source includes sensing the primary winding voltage, for example, by directly sensing the primary voltage or by sensing the voltage across an auxiliary winding that is closely coupled to the primary winding.

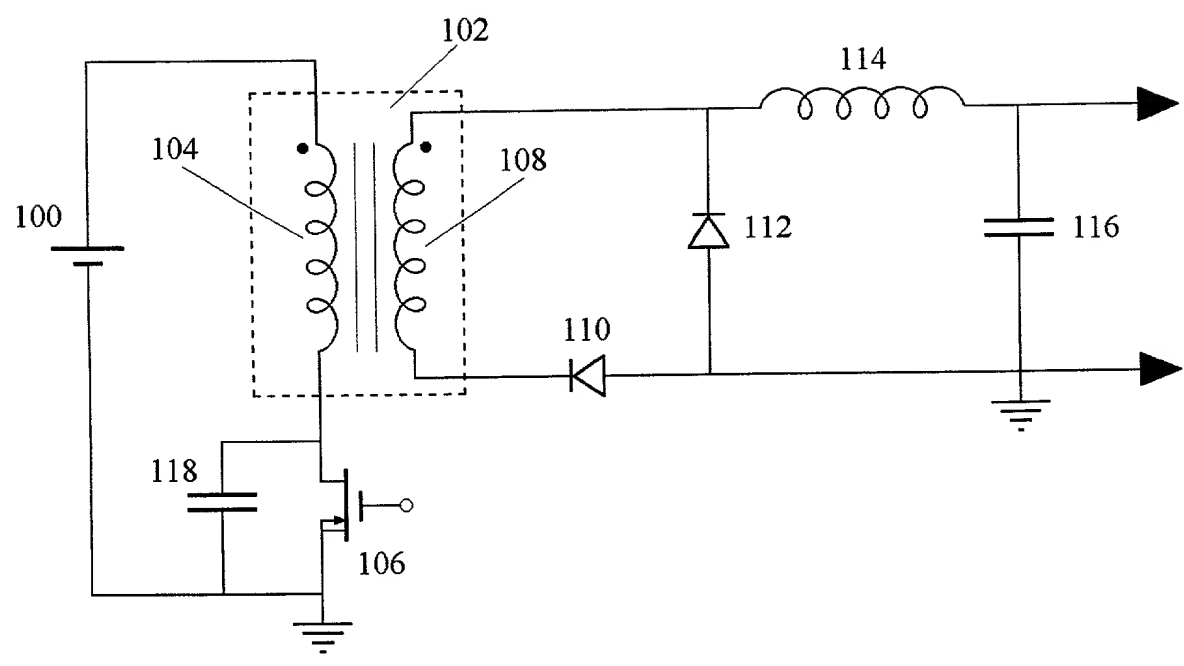


Fig. 2A

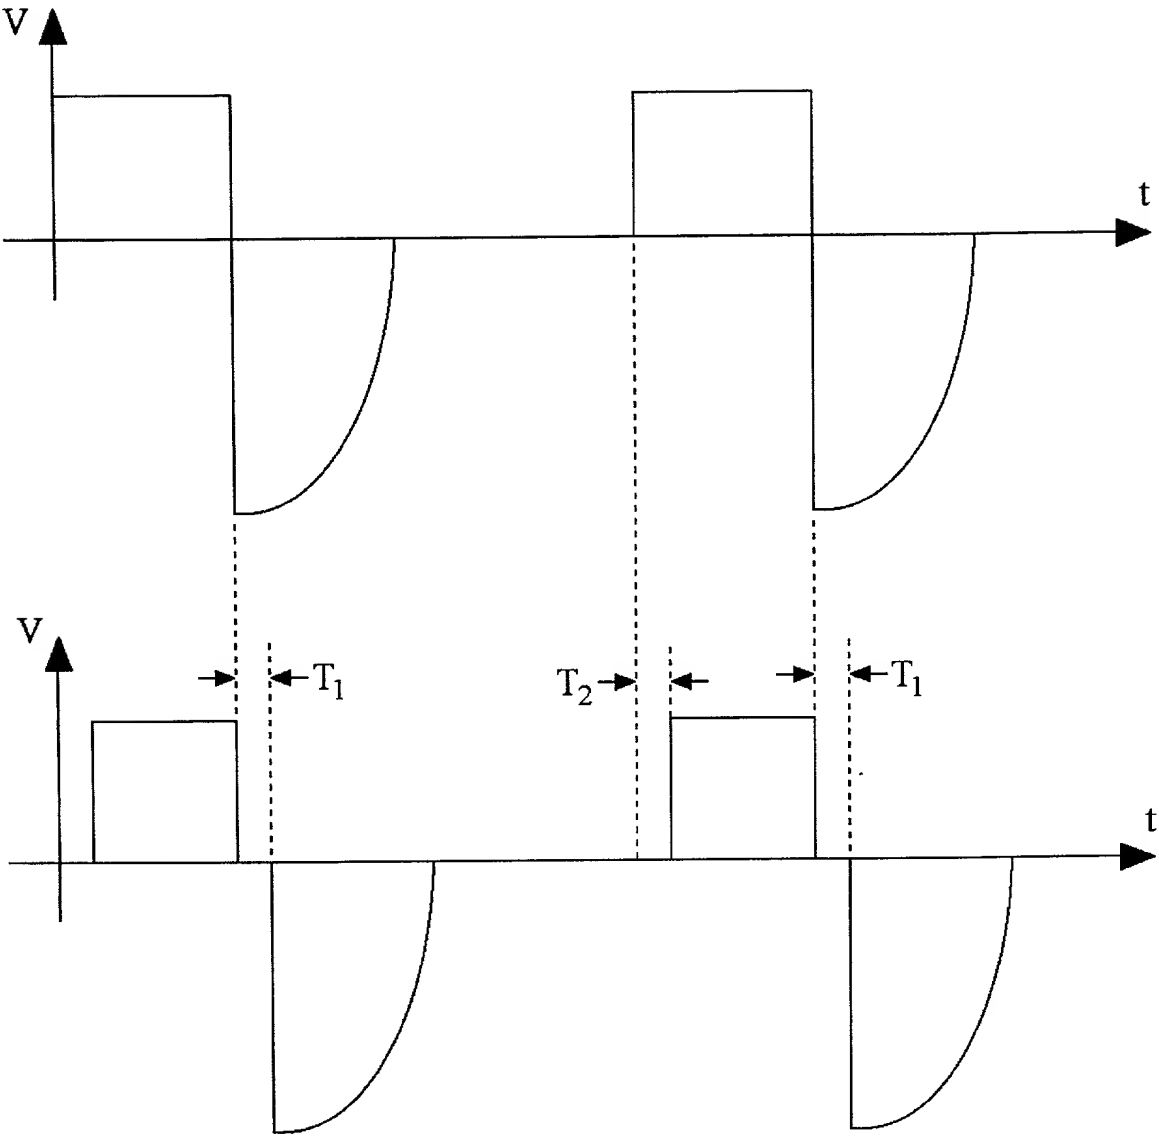
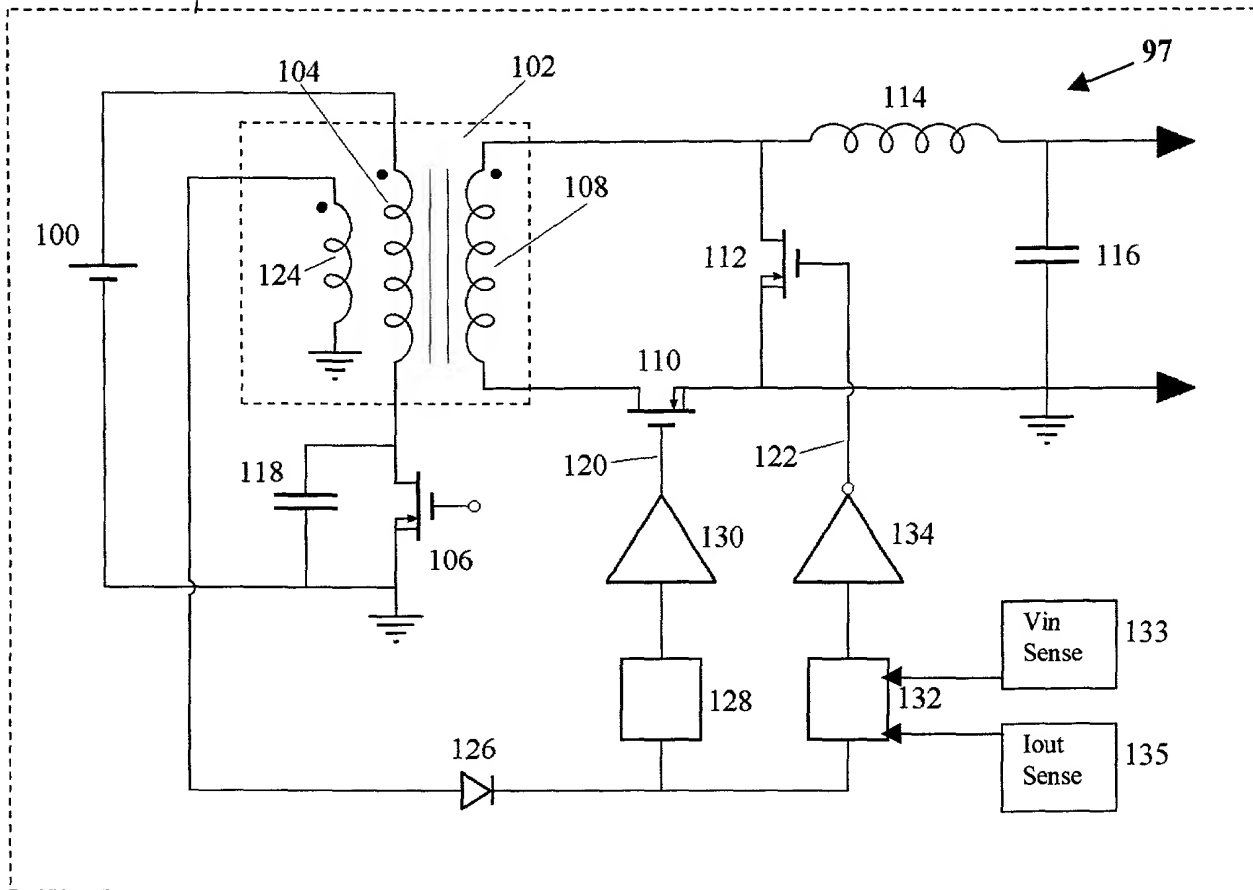
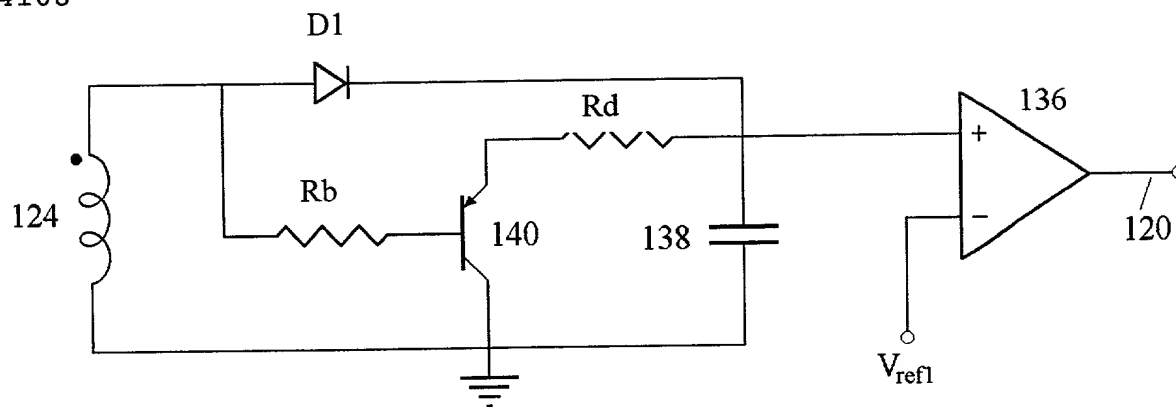
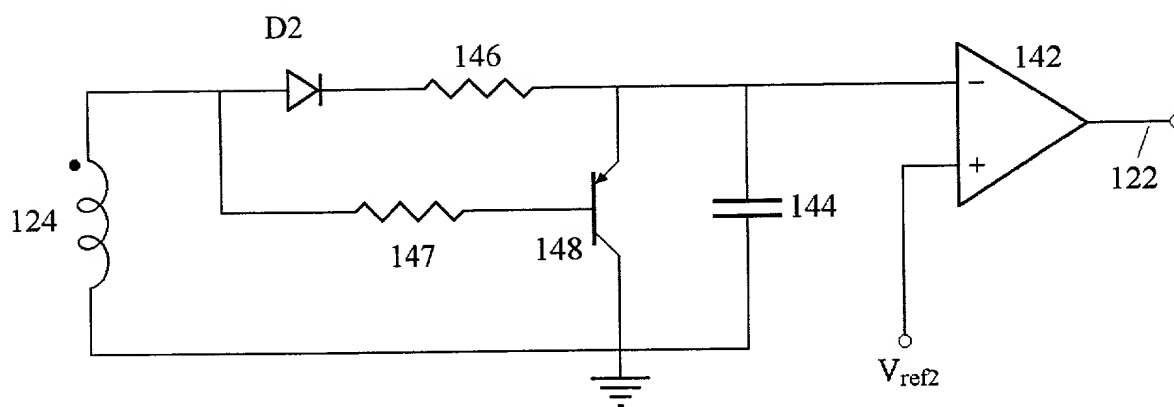


Fig. 2B

**Fig. 3**

**Fig. 4****Fig. 5**

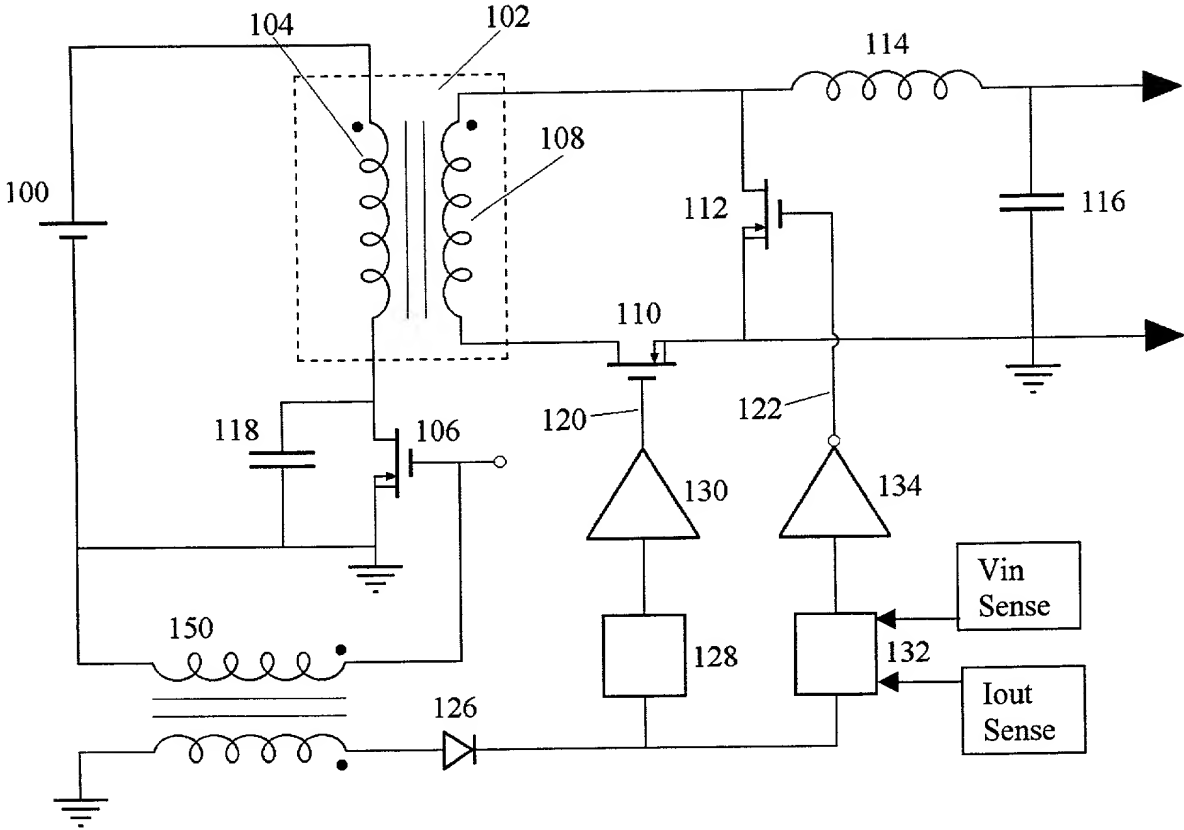


Fig. 6

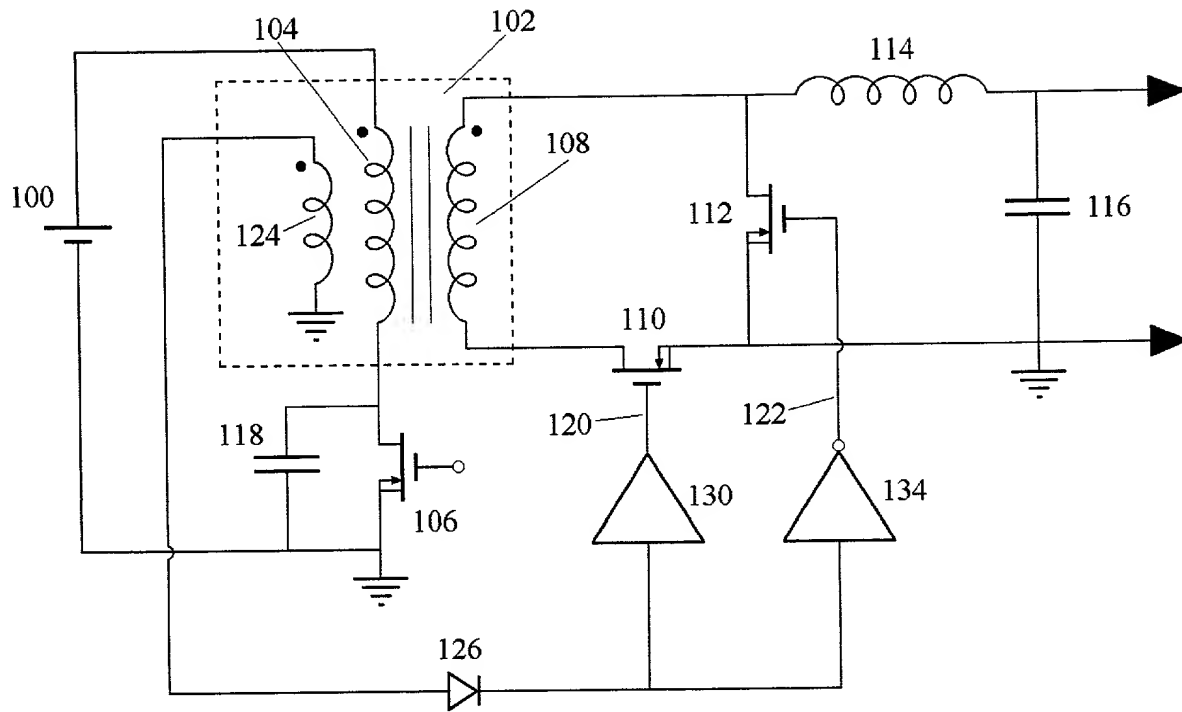
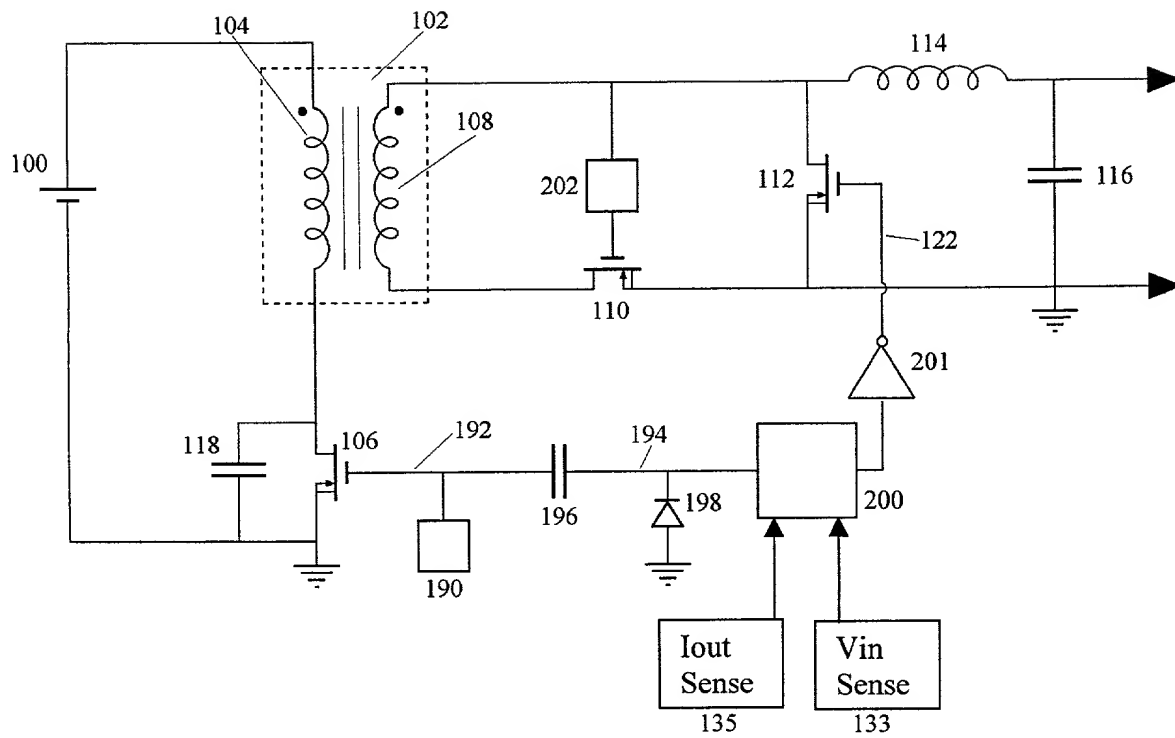


Fig. 7



FIG. 9



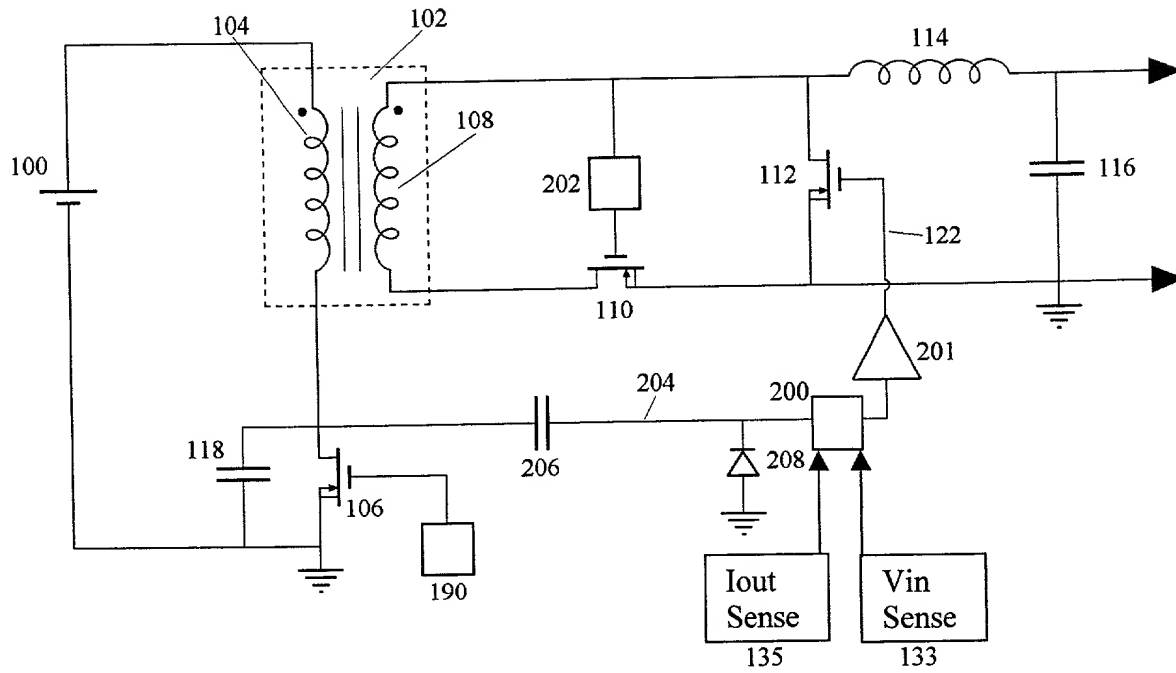


Fig. 10

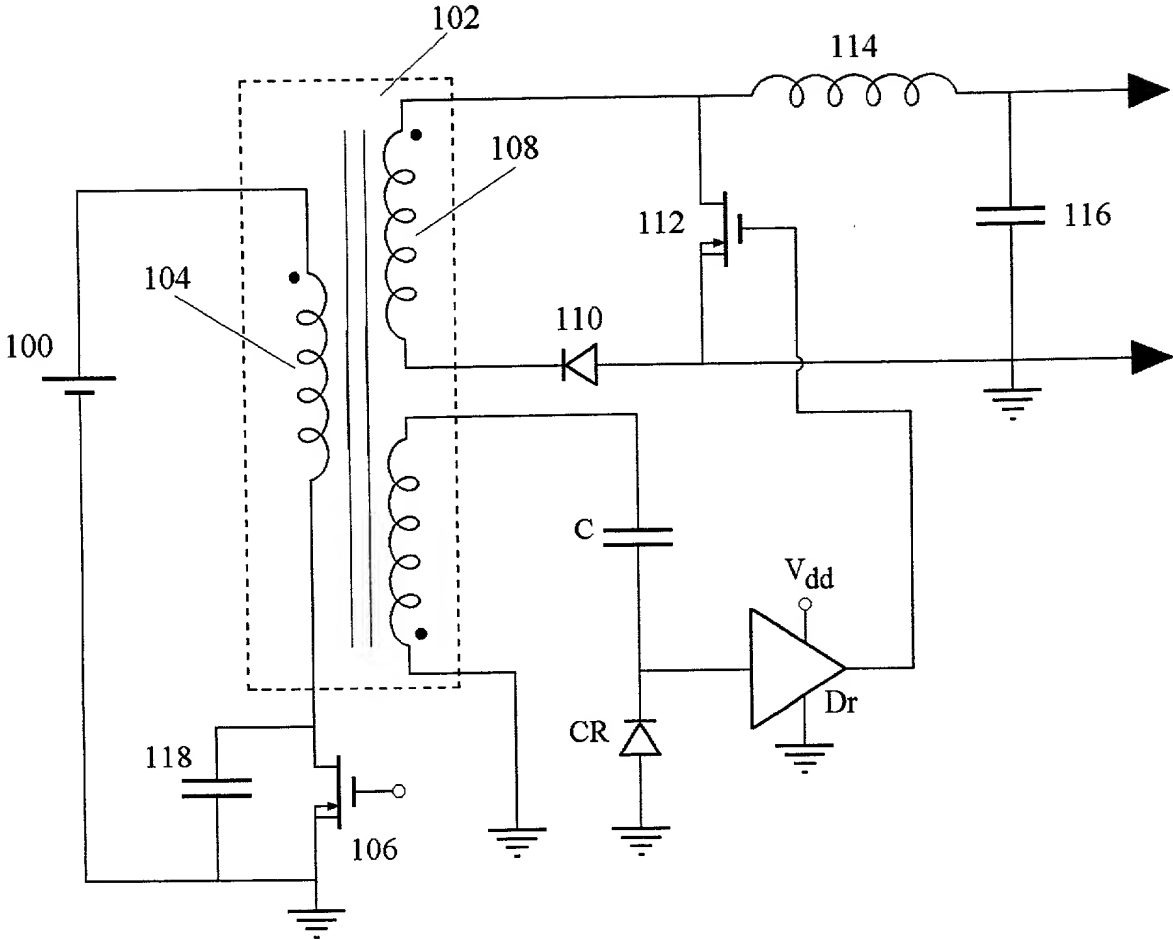


Fig. 11

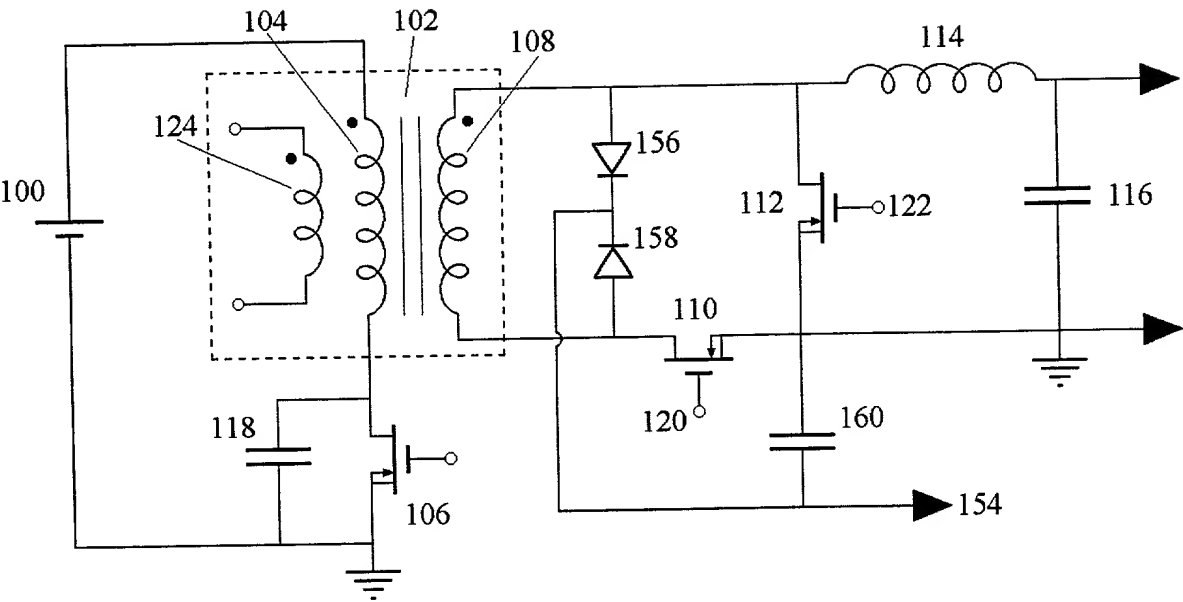


Fig. 12

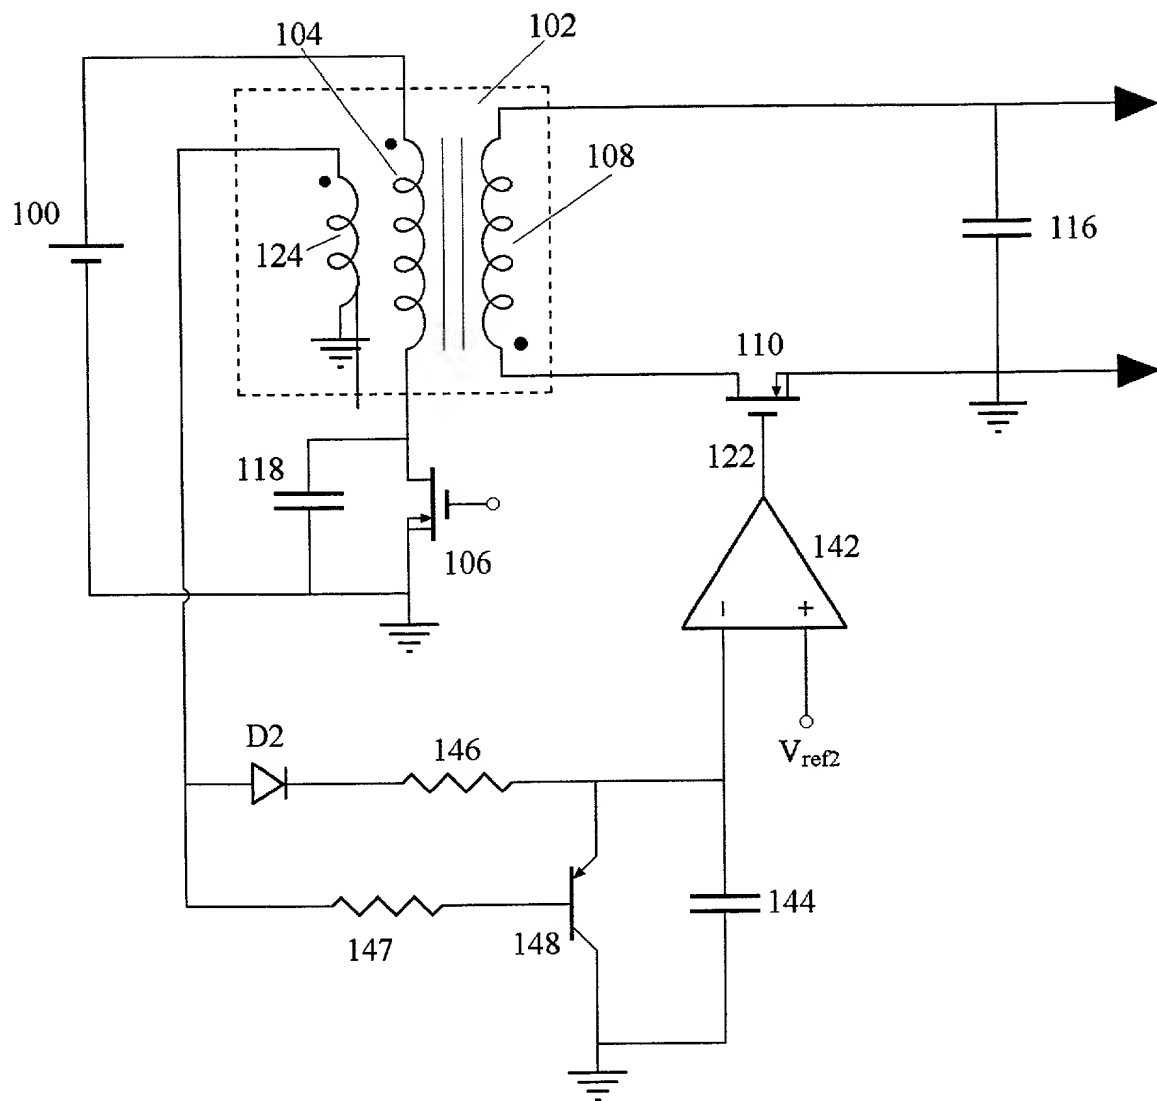




Fig. 13





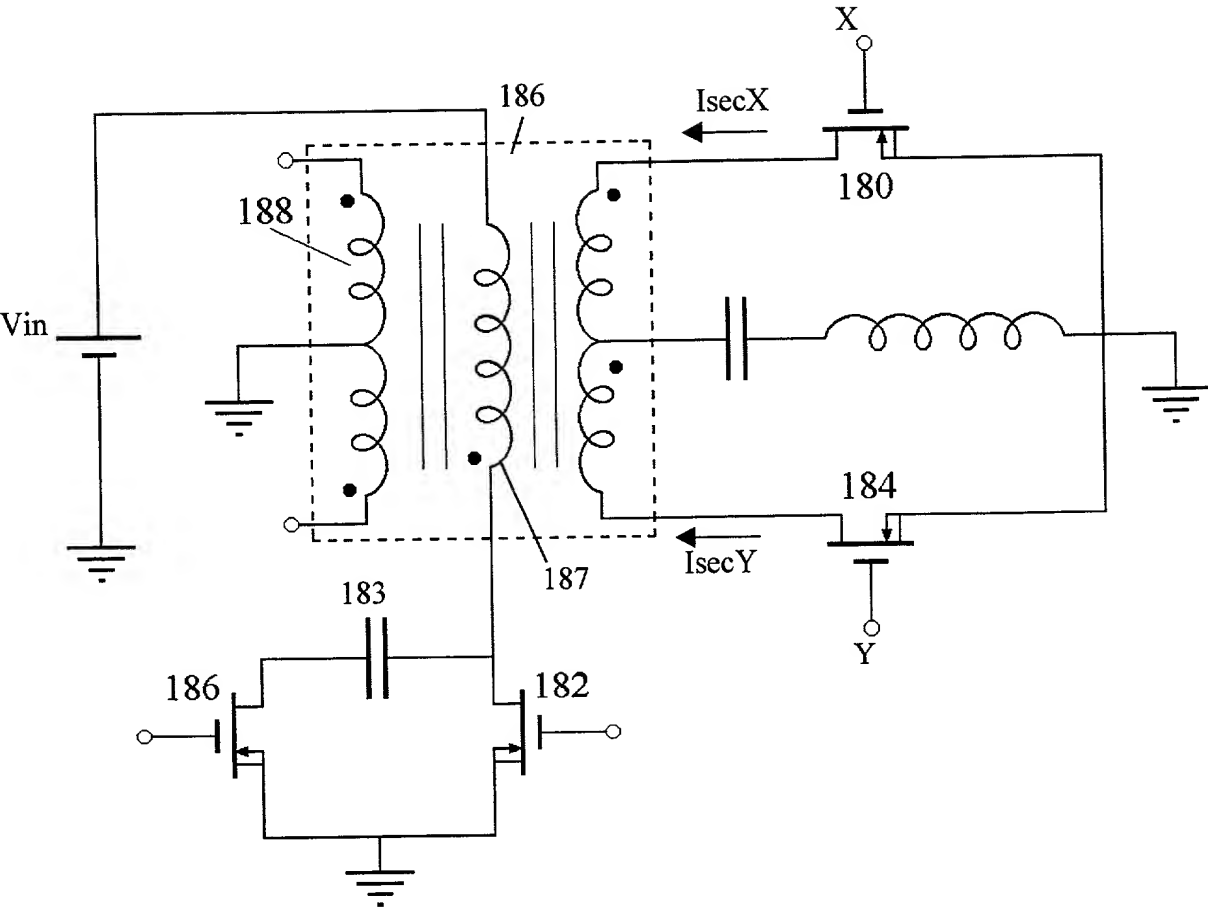


Fig. 16

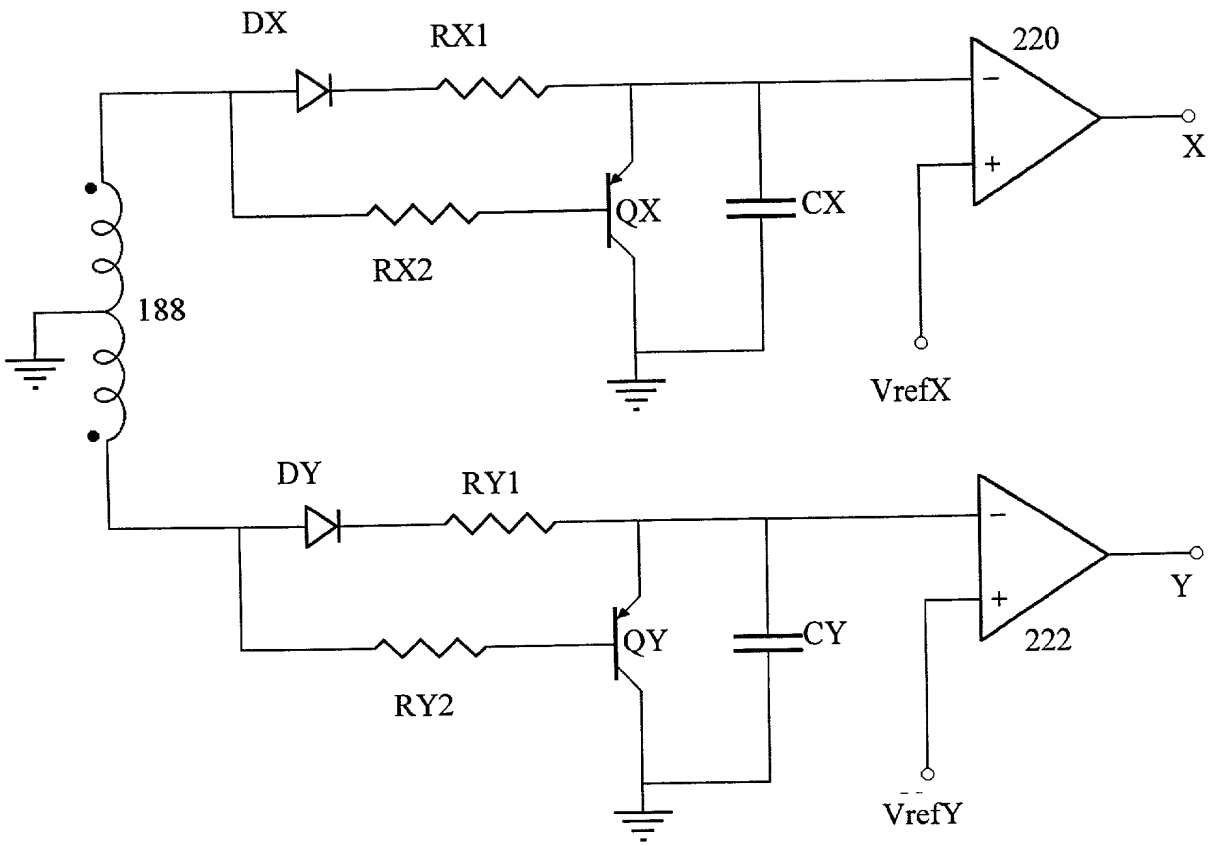


Fig. 17

009007" 03442960

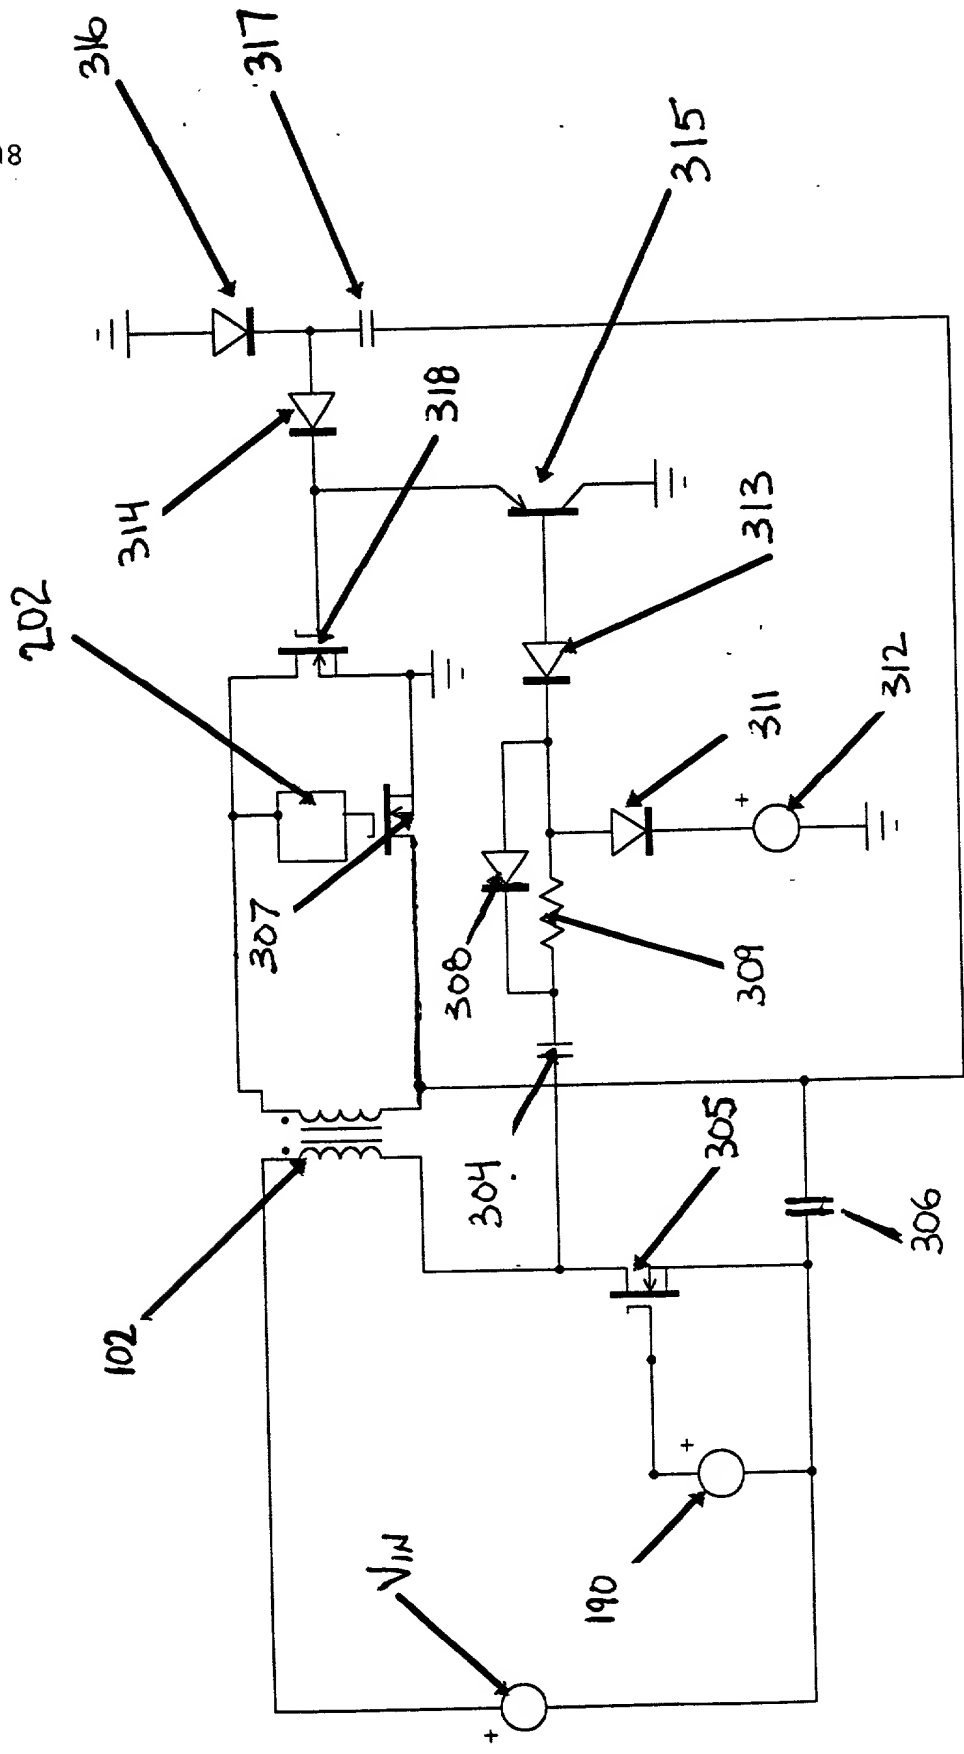


Fig. 18


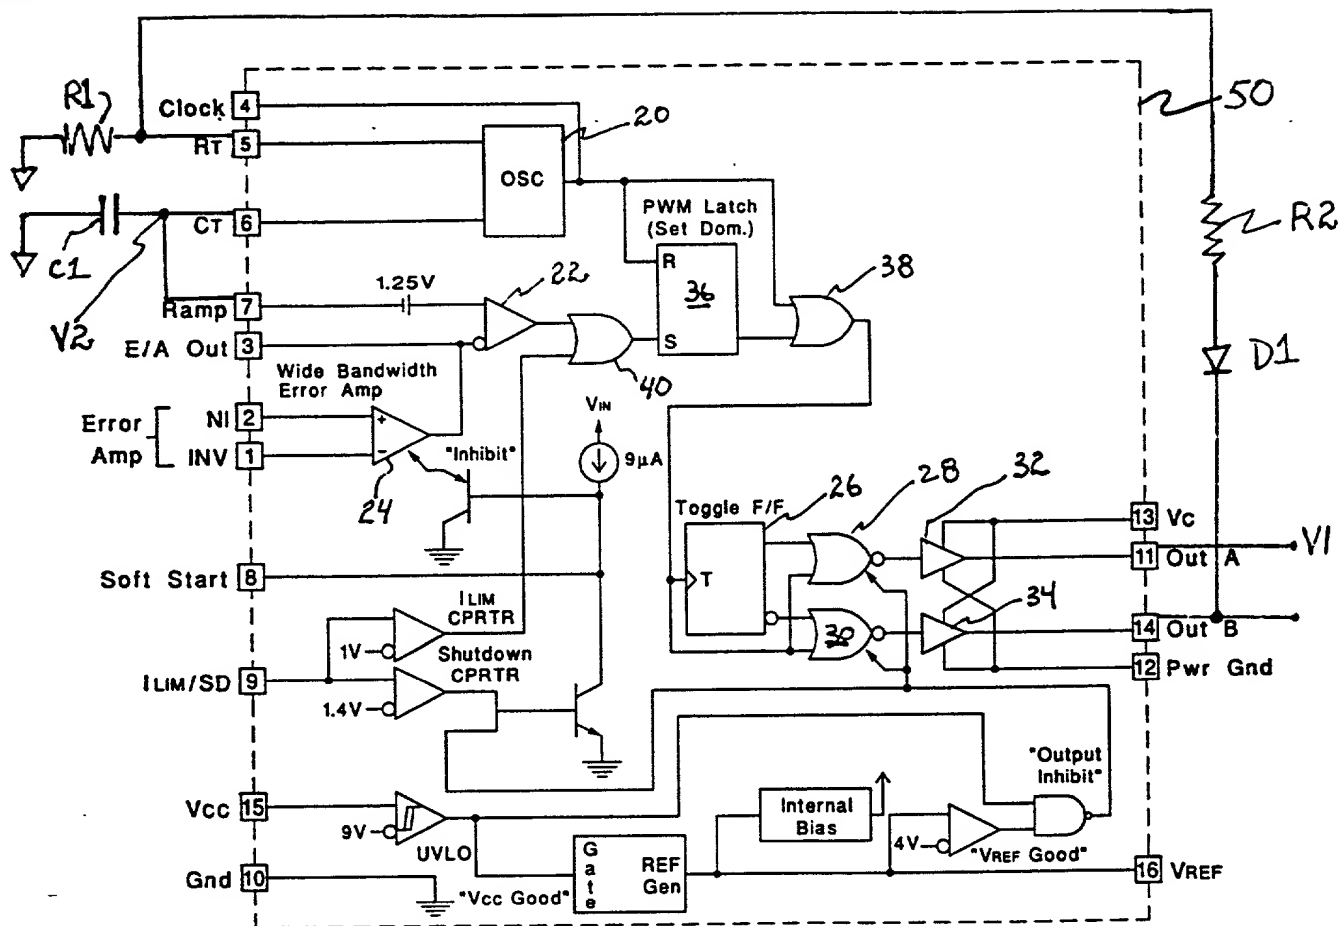


Fig. 19

UC3825

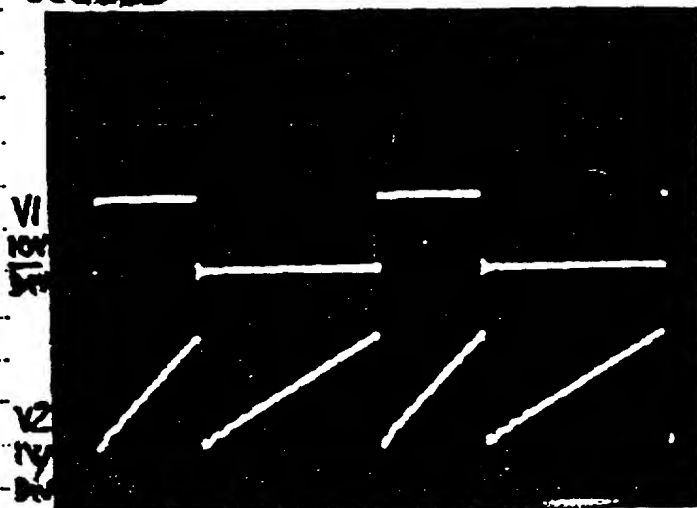

H = 1μs/DIV (UNCOMPENSATED)

Fig. 20

PERIOD = 8μs
FREQ OUT = 125KHz
CT FREQ = 25KHz

Oct-06-2000 02:31pm From-MORGAN & FINNEGAN

T-279 P.002/004 F-294

Docket No. 1731-4108

EXPRESS MAIL LABEL NO. EJ 606 937 009 US

**COMBINED DECLARATION AND POWER OF ATTORNEY FOR
ORIGINAL, DESIGN, NATIONAL STAGE OF PCT, SUPPLEMENTAL
DIVISIONAL, CONTINUATION OR CONTINUATION-IN-PART APPLICATION**

As a below name inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled.

DRIVE CIRCUIT FOR SYNCHRONOUS RECTIFIERS

the specification of which

- a. ☒ is attached hereto
- b. ☐ was filed on _____ as application Serial No. _____ and was amended on _____ (if applicable).

PCT FILED APPLICATION ENTERING NATIONAL STAGE

- c. ☐ was described and claimed in International Application No. _____ filed on _____ and as amended on _____ (if any).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

I hereby specify the following as the correspondence address to which all communications about this application are to be directed:

SEND CORRESPONDENCE TO: Jonathan J. Wainer
INVENSYS
Intellectual Property Law Department
33 Commercial Street, B52-1J
Foxboro, MA 02035

DIRECT TELEPHONE CALLS TO: David V. Rossi, Esq.
(212) 758-4800

☐ I hereby claim foreign priority benefits under Title 35, United States Code § 119(a)-(d) or under § 365(b) of any foreign application(s) for patent or inventor's certificate or under § 365(a) of any PCT international application(s) designating at least one country other than the U.S. listed below and also have identified below such foreign application(s) for patent or inventor's certificate or such PCT international application(s) filed by me on the same subject matter having a filing date within twelve (12) months before that of the application on which priority is claimed:

009001" 05049600

Oct-08-2000 02:31pm From:MORGAN & FINNEGAN

T-273 P.003/004 F-284

Docket No. 1731-4108

☐ The attached 35 U.S.C. § 119 claim for priority for the application(s) listed below forms a part of this declaration.

<u>Country/PCT</u>	<u>Application Number</u>	<u>Date of filing (day, month, yr)</u>	<u>Date of Issue (day, month, yr)</u>	<u>Priority Claimed</u>
				<input type="checkbox"/> YES <input type="checkbox"/> NO
				<input type="checkbox"/> YES <input type="checkbox"/> NO
				<input type="checkbox"/> YES <input type="checkbox"/> NO

☒ I hereby claim the benefit under 35 U.S.C. § 119(c) of any U.S. provisional application(s) listed below.

<u>Provisional Application No.</u>	<u>Date of Filing (day, month, yr)</u>
60/158,339	October 8, 1999

ADDITIONAL STATEMENTS FOR DIVISIONAL, CONTINUATION OR CONTINUATION-IN-PART OR PCT INTERNATIONAL APPLICATION(S) (DESIGNATING THE U.S.)

I hereby claim the benefit under Title 35, United States Code § 120 of any United States application(s) or under § 365(c) of any PCT international application(s) designating the U.S. listed below.

<u>US/PCT Application Serial No.</u>	<u>Filing Date</u>	<u>Status (patented, pending, abandoned)/ U.S. application no. assigned (For PCT)</u>
<u>US/PCT Application Serial No.</u>	<u>Filing Date</u>	<u>Status (patented, pending, abandoned)/ U.S. application no. assigned (For PCT)</u>

☐ In this continuation-in-part application, insofar as the subject matter of any of the claims of this application is not disclosed in the above listed prior United States or PCT international application(s) in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with full knowledge of the law, willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

009007 0584850 100600

I hereby appoint the following attorneys and/or agents with full power of substitution and revocation, to prosecute this application, to receive the patent, and to transact all business in the Patent and Trademark Office connected therewith: John A. Diaz (Reg. No. 19,550), John C. Vassil (Reg. No. 19,098), Alfred P. Ewert (Reg. No. 19,887), David H. Pfeffer (Reg. No. 19,825), Harry C. Marcus (Reg. No. 22,390), Robert E. Paulson (Reg. No. 21,046), Stephen R. Smith (Reg. No. 22,615), Kurt E. Richter (Reg. No. 24,052), J. Robert Dailey (Reg. No. 27,434), Eugene Moroz (Reg. No. 25,237), John F. Sweeney (Reg. No. 27,471), Arnold I. Rady (Reg. No. 26,601), Christopher A. Hughes (Reg. No. 26,914), William S. Feiler (Reg. No. 26,728), Joseph A. Calvaruso (Reg. No. 28,287), James W. Gould (Reg. No. 28,859), Richard C. Komson (Reg. No. 27,913), Israel Blum (Reg. No. 26,710), Bartholomew Verdirame (Reg. No. 28,483), Maria C.H. Lin (reg. No. 29,323), Joseph A. DeGirolamo (Reg. No. 28,595), Michael P. Dougherty (Reg. No. 32,730), Seth J. Atlas (Reg. No. 32,454), Andrew M. Riddles (Reg. No. 31,657), Bruce D. DeRenzi (Reg. No. 33,676), Michael M. Murray (Reg. No. 32,537), Mark J. Abate (Reg. No. 32,527), John T. Gallagher (Reg. No. 35,516), Steven F. Meyer (Reg. No. 35,613), Kenneth H. Sonnenfeld (Reg. No. 33,285), Tony V. Pezzano (Reg. No. 38,271), Andrea L. Wayda (Reg. No. 43,979) and Walter G. Hanchuk Reg. No. (35,179) of Morgan & Finnegan, L.L.P. whose address is: 345 Park Avenue, New York, New York, 10154; and Michael S. Marcus (Reg. No. 31,727) and John E. Hoel (Reg. No. 26,279) of Morgan & Finnegan, L.L.P., whose address is 1775 Eye Street, Suite 400, Washington, D.C. 20006, and Jonathan J. Wainer, Reg. No. 36,712, Jules Jay Morris, Reg. No. 30,873; Terrence Martin, Reg. No. 30,291, Christine Rinik, Reg. No. 33,763; David Barron, Reg. No. 39,598; and Sean Derweiler, Reg. No. 42,482 of INVENSYS Intellectual Property Law Department, whose address is 33 Commercial Street, B52-11, Foxboro, MA 02035.

[] I hereby authorize the U.S. attorneys and/or agents named hereinabove to accept and follow instructions from _____ as to any action to be taken in the U.S. Patent and Trademark Office regarding this application without direct communication between the U.S. attorneys and/or agents and me. In the event of a change in the person(s) from whom instructions may be taken I will so notify the U.S. attorneys and/or agents hereinabove.

Inventor's signature *

Citizenship U.S.A.

Post Office Address same as above

Full name of second joint inventor, if any

Inventor's signature*

Residence

Citizenship

Post Office Address

Figure 1 consists of 12 bar charts, each representing a different variable. The x-axis for all charts lists four categories: All respondents, Non-respondents, Respondents who did not complete the survey, and Respondents who completed the survey. The y-axis represents the percentage of respondents, ranging from 0% to 100%.

- Age:** Shows the distribution of age groups. Non-respondents and those who did not complete the survey tend to be younger than the other two groups.
- Sex:** Shows the percentage of males and females. The distributions are relatively similar across all groups.
- Education:** Shows the percentage of respondents with different levels of education. Non-respondents and those who did not complete the survey tend to have lower education levels.
- Income:** Shows the percentage of respondents in different income brackets. The distributions are relatively similar across all groups.
- Marital Status:** Shows the percentage of respondents who are married, single, divorced, or widowed. The distributions are relatively similar across all groups.
- Religion:** Shows the percentage of respondents who follow different religions. The distributions are relatively similar across all groups.
- Ethnicity:** Shows the percentage of respondents who belong to different ethnic groups. The distributions are relatively similar across all groups.
- Race:** Shows the percentage of respondents who belong to different racial groups. The distributions are relatively similar across all groups.
- Political Affiliation:** Shows the percentage of respondents who identify with different political parties. The distributions are relatively similar across all groups.
- Party Affiliation:** Shows the percentage of respondents who identify with different political parties. The distributions are relatively similar across all groups.
- Attitudes towards the environment and government:** Shows the percentage of respondents who hold different attitudes. The distributions are relatively similar across all groups.